



RZ0125MFC

Mini Fixed Under Cabinet Light Led 1W 95lm CRI90 D30 IP44



spot 15°			medium 38°		
h(m)	E(lx)	ø(m)	h(m)	E(lx)	ø(m)
1	258.7	ø0.38	1	265.5	ø0.44
2	64.67	ø0.77	2	66.36	ø0.89
3	28.74	ø1.16	3	29.49	ø1.34
4	16.17	ø1.55	4	16.59	ø1.79
5	10.35	ø1.94	5	10.62	ø2.24

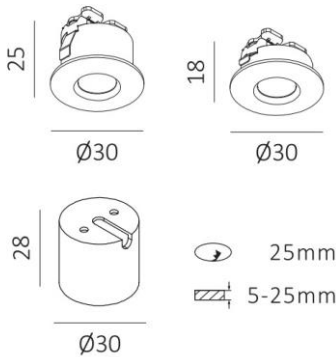

Description

Housing: cast aluminium, designed refined, with connection cable. Fixing ring. Mounting ring: white. Expanding spring fixing for ceiling thicknesses of 5-25mm. Includes control gear with Led driver separate. 2-pole terminal block. LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless. Surface Mount: Expanded and sold separately. Protection Class III.



Technical data

Light source	LED COB
System Wattage	1W - 350mA CC
Luminous flux	95lm
Luminous efficiency	105lm/w
Colour Temperature	2700K, 3000K, 4000K
Colour Rendering Index	CRI90
Colour Deviation	SDCM<3
Beam Angle	15°, 38°, 100°
Cut-Off Angle	-
Tilt Angle	-
Anti-glare Rating	-
Service Lifetime	50.000 Hrs L70 B20 Ta25
Ingress Protection	IP44
Operation Voltage	220-240VAC, 50Hz
Operation Temperature	-20°C ~ 45°C
Frame	Aluminum
Finishing	Matt White, Matt Black
Lighting control (option)	Dali, 0-10V, Triac, Wireless

Accessories

Surface Mount Box

More options:



Notes