
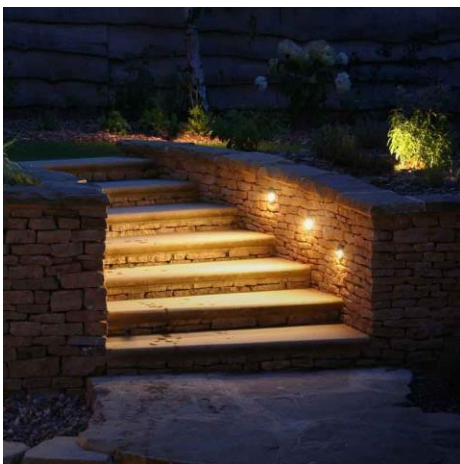
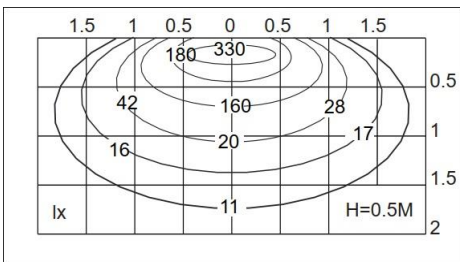



### RZ0167WRC

Wall Recessed Light With Stainless Steel 316 Body, Anti-Corrosion, Transparent Toughened Glass Led 1W 85lm CRI80 D53mm 50.000h IP67



### RZ0367WRC

Wall Recessed Light With Stainless Steel 316 Body, Anti-Corrosion, Transparent Toughened Glass Led 3W 255lm CRI80 D53mm 50.000h IP67

### Description

Recessed luminaire that can be installed in concrete floors, wall or in the ground. It is designed to use white monochrome LED lamps, for lighting, fixed optic.

Housing: Stainless Steel body, Anti-Corrosion, Surface optimised for reduced accumulation of dirt, with a high level of weather resistance, Durable silicone rubber gasket.

Luminaire head with transparent toughened non-reflective glass, resist the impact and friction.

Control gear: Longitudinally watertight cable, 1 cable entries. 2 or 3-pole terminal block.

Installation with separate connection sleeve.

LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Tender and soft light to perfectly present the object without black spot and dark area.

Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless.

Protection mode IP67: dust-proof and accidental immersion up to 1m deep.

Suitable for walk-over with a maximum static load resistance of 300kg.



### Technical data

Light source	LED COB	
System Wattage	1W	3W
Luminous flux	85lm	255lm
Number of led lamp	-	
Luminous efficiency	85lm/w or option	
Colour Temperature	2700K, 3000K, 4000K, 6000K	
Colour Rendering Index	CRI>80, [CRI>90]	
Colour Deviation	SDCM<3	
Beam Angle	Diffused	
Rotation Angle	-	
Anti-glare Rating	-	
Service Lifetime	50.000 Hrs L80 B20 Ta35	
Ingress Protection	IP67	
Operation Voltage	220VAC	24VDC
Operation Temperature	-30°C ~ 50°C	
Frame	Stainless Steel	
Finishing	Non-Color, Matt Black, Matt White	
Lighting control (option)	Dali, 0-10V, Triac, Wireless	

### Accessories

-

### Notes

-