


### RZ0267IGA

Inground Light Stainless Steel 316 Cover, Anti-Corrosion, Transparent Toughened Glass Led 2W 100lm CRI90 24VDC D34mm 50.000h IP67 With Recessed Box

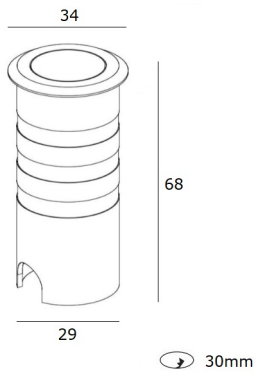

### Description

Recessed luminaire that can be installed in concrete floors or in the ground. It is designed to use white monochrome LED lamps, for lighting, fixed optic.

Housing: Die-casting Aluminum with Stainless Steel 316 Cover, Anti-Corrosion, No-Rinse surface treatment. Surface with electrostatic plastic coating and Optimised for reduced accumulation of dirt, with a high level of weather resistance. Stainless steel fasteners in grade 316, Durable silicone rubber gasket.

Luminaire head with transparent toughened non-reflective glass, resist the impact and friction.

Control gear: Longitudinally watertight cable, 1 cable entries. 2-pole terminal block. Installation with separate connection sleeve.

LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Tender and soft light to perfectly present the object without black spot and dark area.

Protection mode IP67: dust-proof and accidental immersion up to 1m deep.



Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless.

Suitable for walk-over with a maximum static load resistance of 300kg.



### Technical data

Light source	LED COB
System Wattage	2W
Luminous flux	100lm
Number of led lamp	1 Led
Luminous efficiency	50lm/w or option
Colour Temperature	2700K, 3000K, 4000K, 6000K
Colour Rendering Index	CRI>90
Colour Deviation	SDCM<3
Beam Angle	15°, 24°, 36°, 60°, 120°
Rotation Angle	-
Anti-glare Rating	-
Service Lifetime	50.000 Hrs L80 B20 Ta35
Ingress Protection	IP67
Operation Voltage	24VDC
Operation Temperature	-30°C ~ 50°C
Frame	Aluminum & Stainless Steel 316 Cover
Finishing	Non-Color
Lighting control (option)	Dali, 0-10V, Triac, Wireless, DMX512

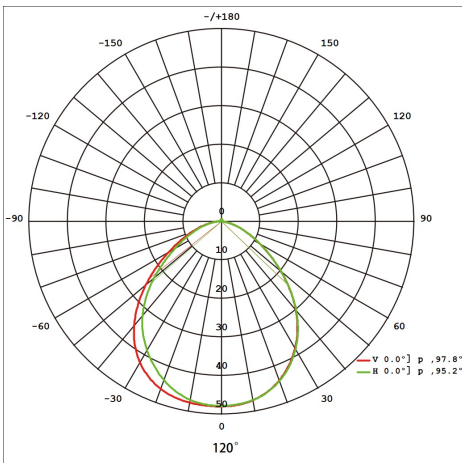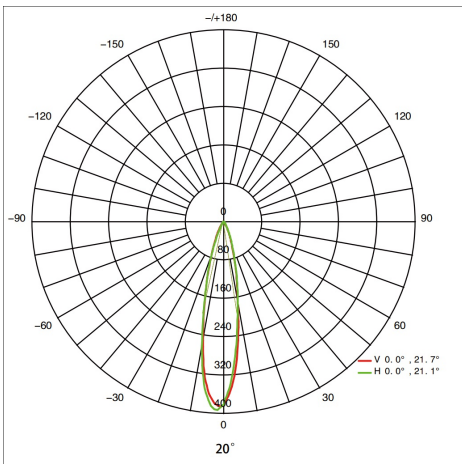

### Accessories

Recessed box

### Notes

-