


RZ0268UWS

Underwater Light Stainless Steel 316 Body, Anti-Corrosion, Transparent Toughened Glass Led 2W 160lm CRI80 24VDC D76mm 50.000h IP68 With Recessed Box



Description

Recessed luminaire that can be installed in underwater or in the ground. It is designed to use LED lamps, for lighting, fixed optic.

Housing: Stainless Steel 316 Body, Anti-Corrosion, No-Rinse surface treatment. Optimised surface for reduced accumulation of dirt, with a high level of weather resistance. Stainless steel fasteners in grade 316, Durable silicone rubber gasket.

Luminaire head with transparent toughened non-reflective glass, resist the impact and friction.

Control gear: Longitudinally watertight cable, 1 cable entries. 2-pole terminal block.



Installation with separate connection sleeve.

LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Tender and soft light to perfectly present the object without black spot and dark area.

Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless.

Protection mode IP68: Protection against dust ingress, continuous immersion up to 3m deep.

Suitable for walk-over with a maximum static load resistance of 300kg.

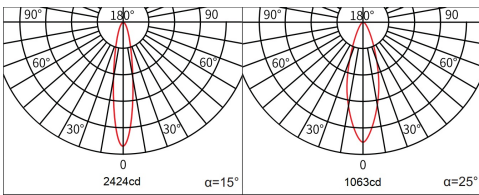

Technical data

Light source	LED COB
System Wattage	2W
Luminous flux	160lm
Number of led lamp	1 Led
Luminous efficiency	80lm/w or option
Colour Temperature	2700K, 3000K, 4000K, 6000K, [RGB]
Colour Rendering Index	CRI>80
Colour Deviation	SDCM<3
Beam Angle	15°, 25°, 40°
Rotation Angle	-
Anti-glare Rating	-
Service Lifetime	50.000 Hrs L80 B20 Ta35
Ingress Protection	IP68
Operation Voltage	24VDC
Operation Temperature	-30°C ~ 50°C
Frame	Stainless Steel 316
Finishing	Non-Color
Lighting control (option)	Dali, 0-10V, Triac, Wireless, DMX512

Accessories

Recessed box

Notes

-

