

### RZ02MRD

Multiple Recessed Fixed Downlight With Anti-Glare Reflector Led 2W 180lm CRI90 SQ45 50.000h White IP44

### RZ04MRD

Multiple Recessed Fixed Downlight With Anti-Glare Reflector Led 2\*2W 360lm CRI90 L75\*W45 50.000h White IP44

### RZ10MRD




Multiple Recessed Fixed Downlight With Anti-Glare Reflector Led 5\*2W 900lm CRI90 L147\*W45 50.000h White IP44

### RZ20MRD

Multiple Recessed Fixed Downlight With Anti-Glare Reflector Led 10\*2W 1800lm CRI90 L280\*W45 50.000h White IP44

### RZ30MRD

Multiple Recessed Fixed Downlight With Anti-Glare Reflector Led 15\*2W 2550lm CRI90 L411\*W45 50.000h White IP44

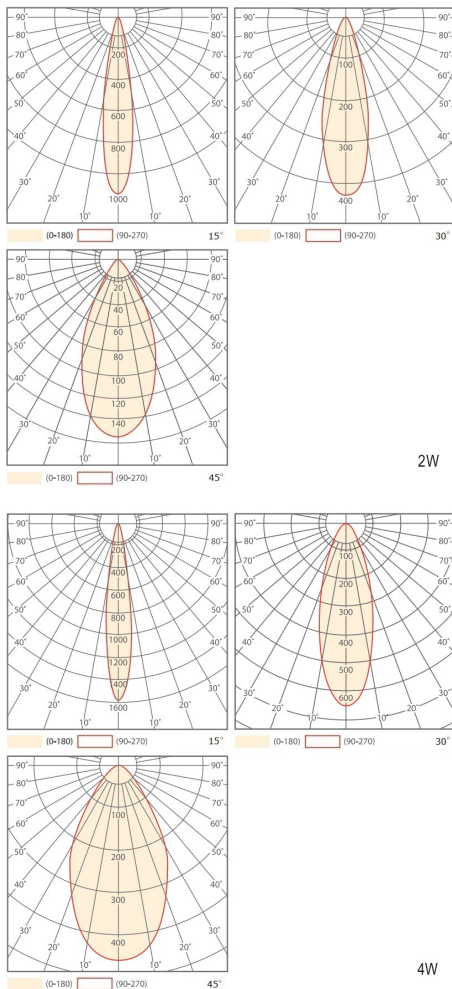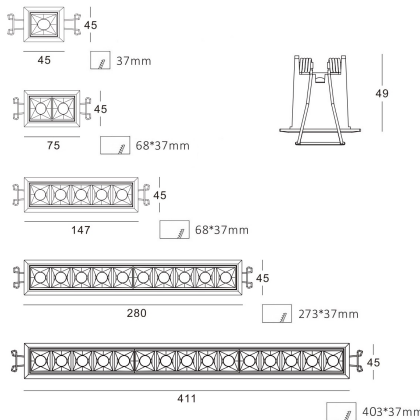

### Description

Housing: cast aluminium, Mini Recessed Fixed Downlight are a range of compact and functional designed spotlights, with connection cable.

Mounting ring: white. Expanding spring fixing for ceiling thicknesses of 5-25mm. Includes control gear with Led driver separate. 2-pole terminal block.

LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Tender and soft light to perfectly present the object without black spot and dark area.

Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless.

Darklight reflector: Polymethyl, Chrome, Matt White, Matt Black, Customized. High quality optical diffuser reduce LED dazzle light. Cut-off angle 30° with Anti-glare Rating UGR<19. Deep anti-glare design, protect the eye.

Protection Class III.



### Technical data

Light source	LED COB				
System Wattage	2W	2*2W	5*2W	10*2W	15*2W
Luminous flux	180lm	360lm	900lm	1800lm	2550lm
Luminous efficiency	90lm/w or option				
Colour Temperature	2700K, 3000K, 4000K, 6000K				
Colour Rendering Index	CRI>90				
Colour Deviation	SDCM<3				
Beam Angle	15°, 30°, 45°				
Cut-Off Angle	30°				
Tilt Angle	-				
Anti-glare Rating	UGR<19				
Service Lifetime	50.000 Hrs L70 B20 Ta25				
Ingress Protection	IP44				
Operation Voltage	220-240VAC, 50Hz				
Operation Temperature	-20°C ~ 45°C				
Frame	Aluminum				
Finishing	Matt White, Matt Black				
Lighting control (option)	Dali, 0-10V, Triac, Wireless				

### Accessories

-

### Notes

-