

RZ0335MA


Mini Recessed Adjustable Downlight Led 3W 255lm CRI90 D38 50.000h White IP44

RZ0545MA

Mini Recessed Adjustable Downlight Led 5W 425lm CRI90 D50 50.000h White IP44

RZ0755MA

Mini Recessed Adjustable Downlight Led 7W 595lm CRI90 D60 50.000h White IP44



Model	Dimension	Cut-out
RZ0335MA	D35*H45	D30
RZ0545MA	D50*H58	D45
RZ0755MA	D60*H58	D55

Description

Housing: Cast aluminium, Mini Recessed Adjustable Downlight are a range of compact and functional designed spotlights, with connection cable.

Mounting ring: white. Expanding spring fixing for ceiling thicknesses of 5-25mm. Includes control gear with Led driver separate. 2-pole terminal block.

LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Tender and soft light to perfectly present the object without black spot and dark area.

Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless.


Anti-glare cone with covered mounting detail: polymer, matt white, matt black, ... with High quality optical diffuser reduce LED dazzle light. Optical cut-off 40° with Deep anti-glare design, protect the eye.

Protection Class III.



Technical data

Light source	LED COB		
System Wattage	3W	5W	7W
Luminous flux	255lm	425lm	595lm
Luminous efficiency	85lm/w or option		
Colour Temperature	2700K, 3000K, 4000K, 6000K		
Colour Rendering Index	CRI>90		
Colour Deviation	SDCM<3		
Beam Angle	15°, 24°, 38°		
Cut-Off Angle	40°		
Tilt Angle	25°		
Anti-glare Rating	UGR<16		
Service Lifetime	50.000 Hrs L70 B20 Ta25		
Ingress Protection	IP44		
Operation Voltage	220-240VAC, 50Hz		
Operation Temperature	-20°C ~ 45°C		
Frame	Aluminum		
Finishing	Matt White, Matt Black		
Lighting control (option)	Dali, 0-10V, Triac, Wireless		

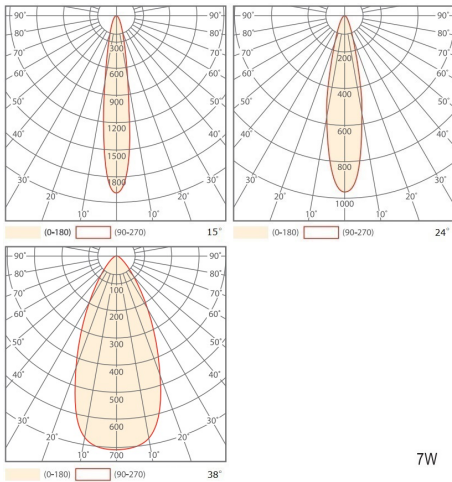

Accessories

-

Notes

-