

RZ0335MAS

Mini Adjustable Under Shelf Light Led 3W 210lm CRI90 D40 IP44



Description

Housing: cast aluminium, with the combination of surface and recessed mounting design, with connection cable. Led nipple 30° tilt, 355° rotation. Mounting ring: white. Expanding spring fixing for ceiling thicknesses of 5-25mm. Includes control gear with Led driver separate. 2-pole terminal block. LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless. Protection Class III.





Technical data

spot 18°			medium 24°		
h(m)	E(lx)	ø(m)	h(m)	E(lx)	ø(m)
1	551.1	ø0.32	1	402.4	ø0.44
2	137.8	ø0.65	2	100.6	ø0.88
3	61.23	ø0.97	3	44.71	ø1.31
4	34.44	ø1.30	4	25.15	ø1.75
5	22.04	ø1.62	5	16.09	ø2.19

wide 36°		
h(m)	E(lx)	ø(m)
1	276.0	ø0.60
2	69.00	ø1.22
3	30.67	ø1.83
4	17.25	ø2.43
5	11.04	ø3.04

Light source	LED COB
System Wattage	3W - 700mA CC
Luminous flux	210lm
Luminous efficiency	80lm/w
Colour Temperature	2700K, 3000K, 4000K
Colour Rendering Index	CRI90
Colour Deviation	SDCM<3
Beam Angle	18°, 24°, 36°
Cut-Off Angle	-
Tilt Angle	30°
Anti-glare Rating	UGR<13 (Long Snoot); UGR<24 (Short snoot)
Service Lifetime	50.000 Hrs L90 B20 Ta25
Ingress Protection	IP44
Operation Voltage	220-240VAC, 50Hz
Operation Temperature	-20°C ~ 45°C
Frame	Aluminum
Finishing	Matt White, Matt Black
Lighting control (option)	Dali, 0-10V, Triac, Wireless

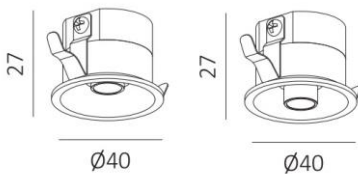

Accessories

-

Notes

