





RZ0335MRF

Mini Round Recessed Fixed Downlight Led 3W 255lm CRI90 D48 50.000h White IP44



RZ0335MSF

Mini Square Recessed Fixed Downlight Led 3W 255lm CRI90 SQ48 50.000h White IP44

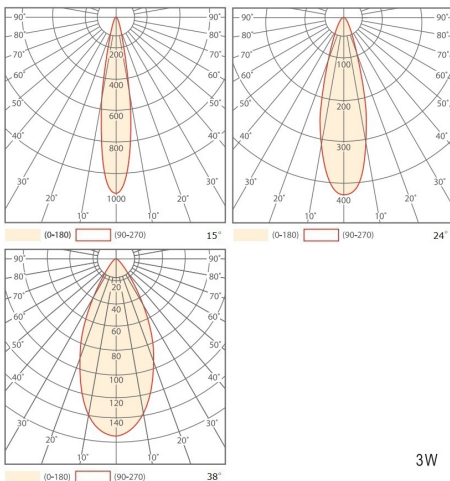

3W

Description

Housing: cast aluminium, Mini Recessed Fixed Downlight are a range of compact and functional designed spotlights, with connection cable.

Mounting ring: white. Expanding spring fixing for ceiling thicknesses of 5-25mm. Includes control gear with Led driver separate. 2-pole terminal block.

LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Tender and soft light to perfectly present the object without black spot and dark area.

Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless.

Covered mounting detail: polymer, matt white, matt black, ... with High quality optical diffuser reduce LED dazzle light.

Protection Class III.



Technical data

Light source	LED COB
System Wattage	3W
Luminous flux	255lm
Luminous efficiency	85lm/w or option
Colour Temperature	2700K, 3000K, 4000K, 6000K
Colour Rendering Index	CRI>90
Colour Deviation	SDCM<3
Beam Angle	15°, 24°, 38°
Cut-Off Angle	-
Tilt Angle	-
Anti-glare Rating	-
Service Lifetime	50.000 Hrs L70 B20 Ta25
Ingress Protection	IP44
Operation Voltage	220-240VAC, 50Hz
Operation Temperature	-20°C ~ 45°C
Frame	Aluminum
Finishing	Matt White, Matt Black
Lighting control [option]	Dali, 0-10V, Triac, Wireless

Accessories

-

Notes

-