



RZ0165GL

Bollard Light With Die-casting Aluminum, Acrylic Diffuser Led 1W 70lm CRI80 220VAC D28*H1000mm 50.000h IP65

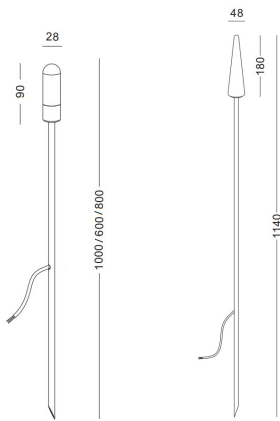

RZ0365GL

Bollard Light With Die-casting Aluminum, Acrylic Diffuser Led 3W 135lm CRI80 220VAC D48*H1140mm 50.000h IP65

Description

Garden bollard light designed to use LED lamps and a spot optic. Consists of an optical assembly and a base.

Housing, Upper cover and base plate: Corrosion-resistant Extruded Aluminum. Optimised surface for reduced accumulation of dirt. Durable silicone rubber gasket. Base plate for mounting on ground socket, concrete anchor or mounting plate.

Luminaire head with Opal PMMA Transparent Diffuser Cover, 360° light guidance ring.

Control gear: 1 cable entries. 3-pole terminal block.

LED module: high-power LEDs on metal-core PCB.

Protection mode IP65: dust-proof and water jet-proof.



Technical data

Light source	LED SMD	
System Wattage	1W	3W
Luminous flux	70lm	135lm
Number of led lamp	-	
Luminous efficiency	70lm/w or option	
Colour Temperature	2700K, 3000K, 4000K, 6000K	
Colour Rendering Index	CRI>80, [CRI>90]	
Colour Deviation	SDCM<3	
Beam Angle	Diffused	
Rotation Angle	-	
Anti-glare Rating	UGR<19	
Service Lifetime	50.000 Hrs L70 B30 Ta35	
Ingress Protection	IP65	
Operation Voltage	220-240VAC, 50Hz	24VDC
Operation Temperature	-30°C ~ 50°C	
Frame	Aluminum	
Finishing	Matt Black or Option	
Lighting control (option)	Dali, 0-10V, Triac, Wireless	

Accessories

-

Notes

-

