


RZ0565WRA

Wall Recessed Light With Die-casting Aluminum, Toughened Glass Cover Led 5W 400lm CRI80 Asymmetric 220VAC 65*L170mm 50.000h IP65 With Recessed box




RZ0865WRA

Wall Recessed Light With Die-casting Aluminum, Toughened Glass Cover Led 8W 640lm CRI80 Asymmetric 220VAC 65*L260mm 50.000h IP65 With Recessed box

RZ1265WRA

Wall Recessed Light With Die-casting Aluminum, Toughened Glass Cover Led 12W 960lm CRI80 Asymmetric 220VAC 65*L320mm 50.000h IP65 With Recessed box

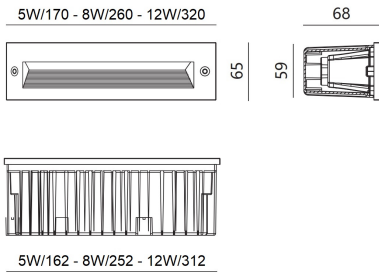

Description

Housing: Die-casting Aluminum, Pre-treated before powder coating ensuring high corrosion resistance, No-Rinse surface treatment. Optimised surface for reduced accumulation of dirt, with a high level of weather resistance. Durable silicone rubber gasket.



Recessed housing: PVC

Control gear: 1 cable entries. 3-pole terminal block.

LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Tender and soft light to perfectly present the object without black spot and dark area.

Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless

Protection mode IP65: dust-proof and water jet-proof.

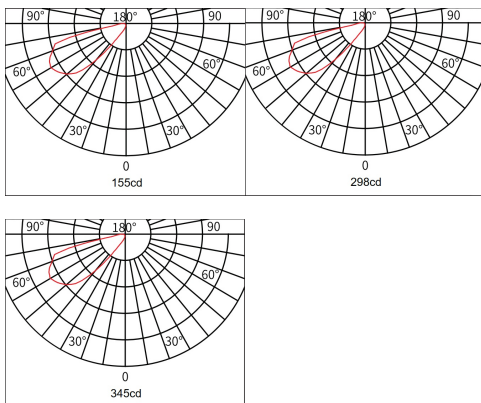

Technical data

Light source	LED SMD		
System Wattage	5W	8W	12W
Luminous flux	400lm	640lm	960lm
Number of led lamp	-		
Luminous efficiency	80lm/w or option		
Colour Temperature	2700K, 3000K, 4000K, 6000K		
Colour Rendering Index	CRI>80, [CRI>90]		
Colour Deviation	SDCM<3		
Beam Angle	Asymmetric		
Rotation Angle	-		
Anti-glare Rating	-		
Service Lifetime	50.000 Hrs L80 B20 Ta35		
Ingress Protection	IP65		
Operation Voltage	100-240VAC, 50Hz	24VDC	
Operation Temperature	-30°C ~ 50°C		
Frame	Aluminum		
Finishing	Grey, Matt White, Matt Black or Option		
Lighting control (option)	Dali, 0-10V, Triac, Wireless		

Accessories

Wall recessed box

Notes

-

