



### RZ0612-LL

Lifting Height Electric Remote Lighting Power 25W 100-240VAC, Lifting Weight Max 6KG, Lamp Power Max 800W IP55 Lifting Height 12M

### RZ0616-LL

Lifting Height Electric Remote Lighting Power 25W 100-240VAC, Lifting Weight Max 6KG, Lamp Power Max 800W IP55 Lifting Height 16M

### RZ0622-LL

Lifting Height Electric Remote Lighting Power 25W 100-240VAC, Lifting Weight Max 6KG, Lamp Power Max 800W IP55 Lifting Height 22M

### Description

Housing: Die-cast Aluminum with inner aluminum heatsink.

Turn traditional high-altitude maintenance into ground maintenance, improve maintenance efficiency and reduce maintenance costs.


High reliability and simple operation, improving the safety of personnel and equipment.

Easy installation and improved space utilization.

There is no need to stop production during installation and maintenance, no margin loss.

The ends where cable comes out, there are with waterproof PG connections, it secures the cable and keep water and dust from entering.

IP54 waterproof, dust-proof, smooth appearance, easy to clean.

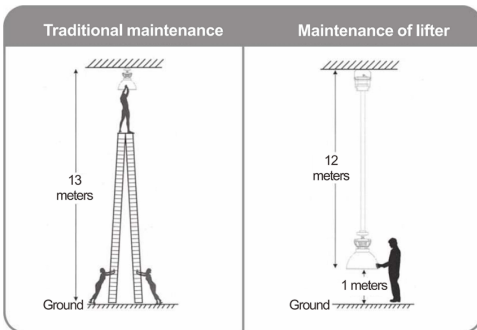


160

320



### Technical data

System Wattage	25W		
Lifting Height	12M	16M	22M
Lifting Weight	Max. 6KG		
Lamp Power	Max. 800W		
Remote Control Distance	Max. 30M		
Lifting Speed	4M/min		
Ingress Protection	IP54		
Operation Voltage	100-240VAC, 50Hz		
Operation Temperature	-30°C ~ 50°C		
Frame	Aluminum		
Net Weight	2.5kg		
Finishing	Sliver		
Control method	Remote Control		

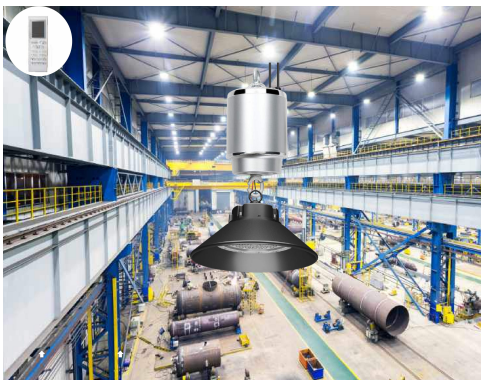

### Accessories

-

### Notes

-