

Model	Dimension	Cut-out
RZ0755FS	64*64*H59mm	55*55mm
RZ1575FS	86*86*H78mm	75*75mm
RZ2595FS	106*106*H92mm	95*95mm

### RZ0755FS

Square Recessed Fixed Downlight With Anti-Glare Reflector Led 7W 595lm CRI90 SQ64 50.000h White IP44

### RZ1575FS

Square Recessed Fixed Downlight With Anti-Glare Reflector Led 15W 1275lm CRI90 SQ86 50.000h White IP44

### RZ2595FS

Square Recessed Fixed Downlight With Anti-Glare Reflector Led 25W 2125lm CRI90 SQ106 50.000h White IP44



### Description

Housing: Cast aluminium, Fixed, designed as heat sink, with connection cable. 0°-25° tilt.  
 Fixing ring: Matt White, Matt Black, Customized.  
 Mounting ring: white. Expanding spring fixing for ceiling thicknesses of 5-25mm. Includes control gear with Led driver separate. 2-pole terminal block.  
 LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Tender and soft light to perfectly present the object without black spot and dark area.  
 Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless.  
 Anti-glare cone with covered mounting detail: Polymethyl, Chrome, Shining Silver, Matt White, Matt Black, Customized. High quality optical diffuser reduce LED dazzle light. Optical cut-off 40°. Deep anti-glare design, protect the eye.  
 Protection Class III.



### Technical data

Light source	LED COB
System Wattage	7W   15W   25W
Luminous flux	595lm   1275lm   2125lm
Luminous efficiency	85lm/w or option
Colour Temperature	2700K, 3000K, 4000K, 6000K
Colour Rendering Index	CRI>90
Colour Deviation	SDCM<3
Beam Angle	15°, 24°, 38°
Cut-Off Angle	40°
Tilt Angle	-
Anti-glare Rating	UGR<16
Service Lifetime	50.000 Hrs L70 B20 Ta25
Ingress Protection	IP44
Operation Voltage	220-240VAC, 50Hz
Operation Temperature	-20°C ~ 45°C
Frame	Aluminum
Finishing	Matt White, Matt Black
Lighting control (option)	Dali, 0-10V, Triac, Wireless

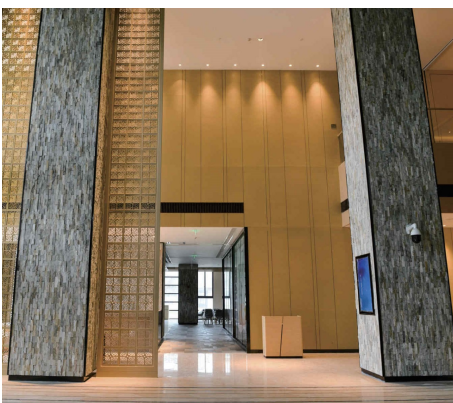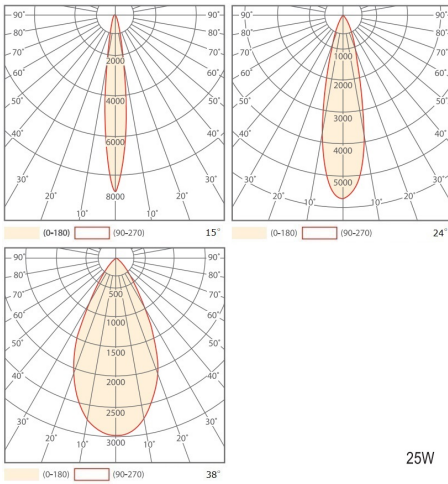

### Accessories

-

### Notes

-