

### RZ0775DW



Recessed Fixed Downlight With Anti-Glare Reflector Waterproof Led 7W 595lm CRI90 D84 50.000h IP65

### RZ0975DW

Recessed Fixed Downlight With Anti-Glare Reflector Waterproof Led 9W 765lm CRI90 D84 50.000h IP65

### RZ1275DW

Recessed Fixed Downlight With Anti-Glare Reflector Waterproof Led 12W 1020lm CRI90 D84 50.000h IP65




### Description

Housing: Cast aluminium, Fixed, designed as heat sink, with connection cable. Fixing ring: Matt White, Matt Black, Customized.  
 Mounting ring: white. Expanding spring fixing for ceiling thicknesses of 5-25mm. Includes control gear with Led driver separate. 2-pole terminal block.  
 LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Tender and soft light to perfectly present the object without black spot and dark area.  
 Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless.  
 Anti-glare cone with covered mounting detail: Polymethyl, Chrome, Shining Silver, Matt White, Matt Black, Customized. High quality optical diffuser reduce LED dazzle light. Optical cut-off 40°. Deep anti-glare design, protect the eye.  
 Protection Class III.



### Technical data

Light source	LED COB		
System Wattage	7W	9W	12W
Luminous flux	595lm	765lm	1020lm
Luminous efficiency	85lm/w or option		
Colour Temperature	2700K, 3000K, 4000K, 6000K		
Colour Rendering Index	CRI>90		
Colour Deviation	SDCM<3		
Beam Angle	15°, 24°, 38°		
Cut-Off Angle	40°		
Tilt Angle	-		
Anti-glare Rating	UGR<16		
Service Lifetime	50.000 Hrs L70 B20 Ta25		
Ingress Protection	IP65		
Operation Voltage	220-240VAC, 50Hz		
Operation Temperature	-20°C ~ 45°C		
Frame	Aluminum		
Finishing	Matt White, Matt Black		
Lighting control (option)	Dali, 0-10V, Triac, Wireless		

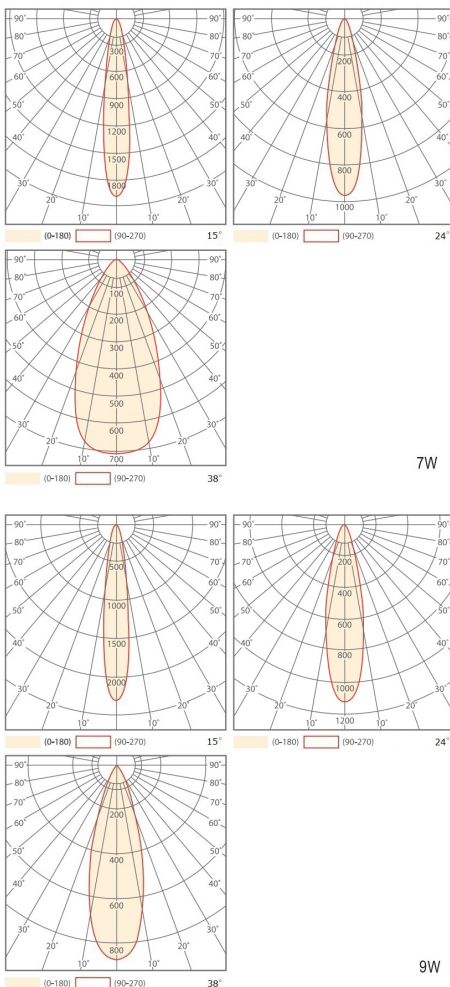

### Accessories

### Notes