


Model	Dimension	Model	Dimension
RZ07WSM	D75*H100	RZ25WSM	D115*H152
RZ09WSM	D75*H100	RZ30WSM	D115*H152
RZ12WSM	D95*H100	RZ40WSM	D140*H162
RZ15WSM	D95*H100	RZ50WSM	D170*H182
RZ20WSM	D95*H152	RZ60WSM	D205*H212

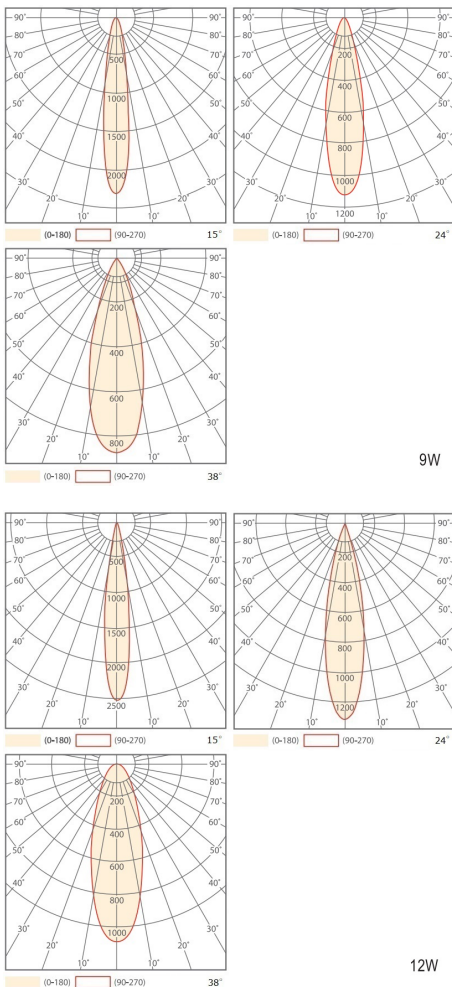

### RZ07WSM

Waterproof Round Surface Mounted Fixed Downlight With Anti-Glare Reflector Led 7W 595lm CRI90 D75\*H100 50.000h IP65

### RZ09WSM

Waterproof Round Surface Mounted Fixed Downlight With Anti-Glare Reflector Led 9W 765lm CRI90 D75\*H100 50.000h IP65

### RZ12WSM

Waterproof Round Surface Mounted Fixed Downlight With Anti-Glare Reflector Led 12W 1020lm CRI90 D95\*H100 50.000h IP65

### RZ15WSM

Waterproof Round Surface Mounted Fixed Downlight With Anti-Glare Reflector Led 15W 1275lm CRI90 D95\*H100 50.000h IP65

### RZ20WSM

Waterproof Round Surface Mounted Fixed Downlight With Anti-Glare Reflector Led 20W 1700lm CRI90 D95\*H152 50.000h IP65

### Description

Designed for shallow ceiling void. With the modularized system, it's easy to use and easy to maintain.  
 Housing: cast aluminium, powder-coated, connection cable. Ceiling fixture: metal. Includes control gear with Led driver. 2-pole terminal block.  
 LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Tender and soft light to perfectly present the object without black spot and dark area.  
 Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless.  
 Anti-glare cone with covered mounting detail: Polymethyl, Chrome, Matt White, Matt Black, Customized. High quality optical diffuser reduce LED dazzle light. Cut-off angle 38° with Anti-glare Rating UGR<16.  
 Protection mode IP65: dust-proof and water jet-proof.



### Technical data

Light source	LED COB
System Wattage	7W   9W   12W   15W   20W
Luminous flux	595lm   765lm   1020lm   1275lm   1700lm
Luminous efficiency	85lm/w or option
Colour Temperature	2700K, 3000K, 4000K, 6000K
Colour Rendering Index	CRI>90
Colour Deviation	SDCM<3
Beam Angle	15°, 24°, 38°
Cut-Off Angle	38°
Tilt Angle	-
Anti-glare Rating	UGR<16
Service Lifetime	50.000 Hrs L70 B20 Ta25
Ingress Protection	IP44
Operation Voltage	220-240VAC, 50Hz
Operation Temperature	-20°C ~ 45°C
Frame	Aluminum
Finishing	Matt White, Matt Black
Lighting control (option)	Dali, 0-10V, Triac, Wireless

### Accessories

-

### Notes

-