


Model	Dimensions
RZ30FL	H215*L184*W47mm
RZ50FL	H275*L242*W48mm
RZ100FL	H325*L285*W53mm
RZ150FL	H385*L320*W58mm
RZ200FL	H435*L354*W65mm



**Option:** 10°, 25°, 45°, 60°

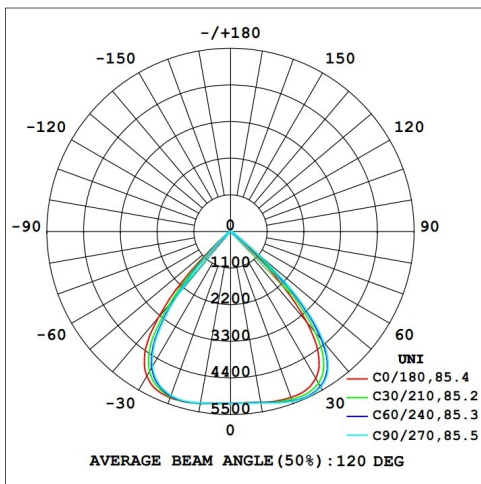

### RZ30FL

Flood Light With Die-casting Aluminum and Tempered Glass Led 30W 3600lm CRI80 120° 220VAC 50.000h IP66 IK08

### RZ50FL

Flood Light With Die-casting Aluminum and Tempered Glass Led 50W 6000lm CRI80 120° 220VAC 50.000h IP66 IK08

### RZ100FL

Flood Light With Die-casting Aluminum and Tempered Glass Led 100W 12000lm CRI80 120° 220VAC 50.000h IP66 IK08

### RZ150FL

Flood Light With Die-casting Aluminum and Tempered Glass Led 150W 18000lm CRI80 120° 220VAC 50.000h IP66 IK08

### RZ200FL

Flood Light With Die-casting Aluminum and Tempered Glass Led 200W 24000lm CRI80 120° 220VAC 50.000h IP66 IK08

### Description


Housing: Fashionable die-cast Aluminum with high thermal conductivity aluminum plate, lead away heat quickly. Use high quality LEDs and power supply to ensure the product reliability and life expectancy.

Professional reflection cup and optical design make the luminous efficiency 10% higher than other LED flood lights under same conditions.

The ends where cable comes out, there are with waterproof PG connections, it secures the cable and keep water and dust from entering.

Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless, Microwave motion sensor.

Protection mode IP66: dust-proof and water jet-proof.



### Technical data

Light source	LED SMD				
System Wattage	30W	50W	100W	150W	200W
Luminous flux	3600lm	6000lm	12000lm	18000lm	24000lm
Luminous efficiency	120lm/w or option				
Colour Temperature	2700K, 3000K, 4000K, 5000K, 6000K, 6500K				
Colour Rendering Index	CRI80				
Colour Deviation	SDCM<5				
Beam Angle	120°				
Cut-Off Angle	-				
Tilt Angle	-				
Anti-glare Rating	-				
Service Lifetime	50.000 Hrs L70 B20 Ta35				
Ingress Protection	IP66				
Operation Voltage	220-240VAC, 50Hz				
Operation Temperature	-30°C ~ 50°C				
Frame	Aluminum				
Finishing	Matt Black				
Lighting control (option)	Dali, 0-10V, Triac, Wireless, Sensor				

### Accessories

-

### Notes

-