

### RZ05MSM

Multiple Surface Mounted Fixed Downlight Led 5W 425lm CRI90 L138\*W33\*H60 50.000h Black IP44

### RZ10MSM


Multiple Surface Mounted Fixed Downlight Led 10W 850lm CRI90 L270\*W33\*H60 50.000h Black IP44

### RZ20MSM

Multiple Surface Mounted Fixed Downlight Led 20W 1700lm CRI90 L535\*W33\*H60 50.000h Black IP44

### RZ30MSM

Multiple Surface Mounted Fixed Downlight Led 30W 2550lm CRI90 L800\*W33\*H60 50.000h Black IP44

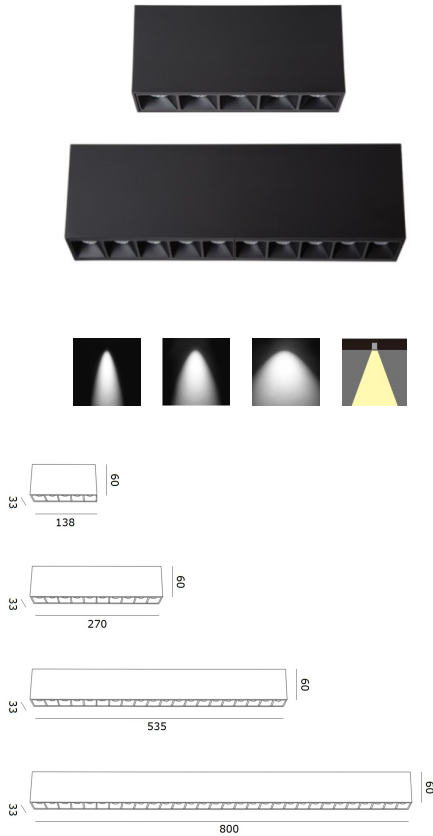

### Description

Designed for shallow ceiling void. With the modularized system, it's easy to use and easy to maintain.

Cylinder: aluminium profile, powder-coated. Ceiling fixture: metal.

Housing: cast aluminium, with connection cable. Includes control gear with Led driver. 2-pole terminal block.

LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Tender and soft light to perfectly present the object without black spot and dark area.

Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless.

Darklight reflector: Polymethyl, Chrome, Matt White, Matt Black, Customized. High quality optical diffuser reduce LED dazzle light. Cut-off angle 30° with Anti-glare Rating UGR<19.

Protection Class III.



### Technical data

Light source	LED COB			
System Wattage	5*1W	10*1W	20*1W	30*1W
Luminous flux	425lm	850lm	1700lm	2550lm
Luminous efficiency	85lm/w or option			
Colour Temperature	2700K, 3000K, 4000K, 6000K			
Colour Rendering Index	CRI>90			
Colour Deviation	SDCM<3			
Beam Angle	15°, 30°, 45°			
Cut-Off Angle	30°			
Tilt Angle	-			
Anti-glare Rating	UGR<19			
Service Lifetime	50.000 Hrs L70 B20 Ta25			
Ingress Protection	IP44			
Operation Voltage	220-240VAC, 50Hz			
Operation Temperature	-20°C ~ 45°C			
Frame	Aluminum			
Finishing	Matt White, Matt Black			
Lighting control (option)	Dali, 0-10V, Triac, Wireless			

### Accessories

-

### Notes

-

