
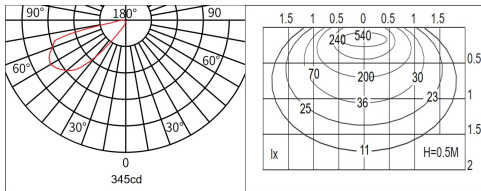


### RZ12BLS

Bollard Light With Die-casting Aluminum, Toughened Glass Cover Led 12W 960lm CRI80 Asymmetric 220VAC 100\*350\*H400mm 50.000h IP65



### Description

Garden bollard light designed to use LED lamps and a spot optic. Consists of an optical assembly and a base.

Housing, Upper cover and base plate: Corrosion-resistant Extruded Aluminum. Optimised surface for reduced accumulation of dirt. Double powder-coated. Durable silicone rubber gasket. Base plate for mounting on ground socket, concrete anchor or mounting plate.

Luminaire head with toughened glass cover, asymmetric light guidance ring.

Anti-glare cone: corrosion-resistant cast aluminum. Glare-free above the light aperture.

Mounting accessories to be ordered separately.

Control gear: 1 cable entries. 3-pole terminal block.

LED module: high-power LEDs on metal-core PCB.

Protection mode IP65: dust-proof and water jet-proof.



### Technical data

Light source	LED SMD
System Wattage	12W
Luminous flux	960lm
Number of led lamp	-
Luminous efficiency	80lm/w or option
Colour Temperature	2700K, 3000K, 4000K, 6000K
Colour Rendering Index	CRI>80, [CRI>90]
Colour Deviation	SDCM<3
Beam Angle	Asymmetric
Rotation Angle	-
Anti-glare Rating	UGR<19
Service Lifetime	50.000 Hrs L70 B30 Ta35
Ingress Protection	IP65
Operation Voltage	100-240VAC, 50Hz   24VDC
Operation Temperature	-30°C ~ 50°C
Frame	Aluminum
Finishing	Grey Matt Black or Option
Lighting control (option)	Dali, 0-10V, Triac, Wireless

### Accessories

-

### Notes

-

