

### RZ1566SLC

Floodlight With Die-casting Aluminum, Anti-Corrosion, Transparent Toughened Glass Led 15W 1200lm CRI80 D108mm 50.000h IP66 with Grey Color






### RZ2266SLC

Floodlight With Die-casting Aluminum, Anti-Corrosion, Transparent Toughened Glass Led 22W 1760lm CRI80 D108mm 50.000h IP66 with Grey Color

### RZ3066SLC

Floodlight With Die-casting Aluminum, Anti-Corrosion, Transparent Toughened Glass Led 30W 2400lm CRI80 D108mm 50.000h IP66 with Grey Color

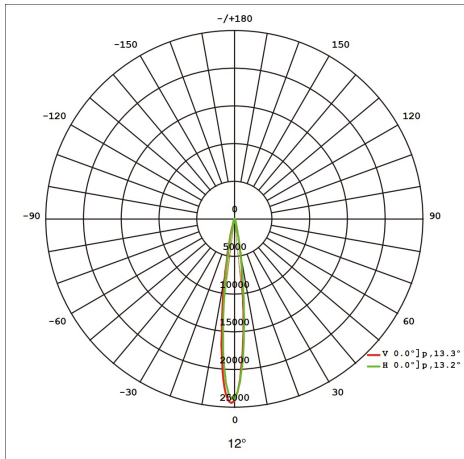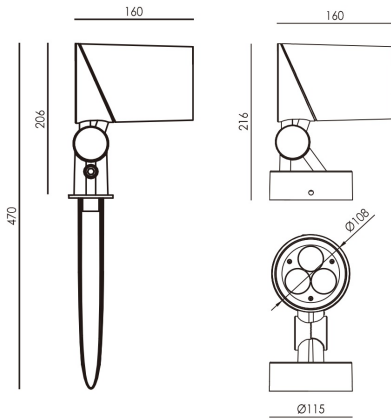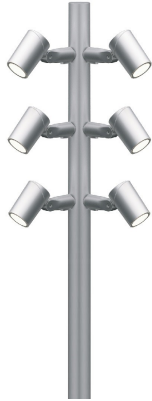

### Description

Outdoor floodlight designed to use LED lamps and a spot optic. Consists of an optical assembly and a base.

Housing, hinge and mounting plate: Die-casting Aluminum, Anti-Corrosion, No-Rinse surface treatment. Surface with fluorine carbon spraying and optimised for reduced accumulation of dirt, with a high level of weather resistance. Hinge with 130° tilt. Mounting plate rotatable through 350°. All external screws used are made of A2 stainless steel. Luminaire head with transparent toughened non-reflective glass, resist the impact and friction.

Control gear: 1 cable entries. [2] 3-pole terminal block.

LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Tender and soft light to perfectly present the object without black spot and dark area.

Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless.

Protection mode IP66: dust-proof and water jet-proof.



### Technical data

Light source	LED COB		
System Wattage	15W	22W	30W
Luminous flux	1200lm	1760lm	2400lm
Number of led lamp	3 Led		
Luminous efficiency	80lm/w or option		
Colour Temperature	2700K, 3000K, 4000K, 6000K, [RGB]		
Colour Rendering Index	CRI>80, [CRI>90]		
Colour Deviation	SDCM<3		
Beam Angle	3°, 6°, 12°, 20°, 30°, 45°, [5x20°], [10x70°]		
Rotation Angle	130° Tilt   350° Swivel		
Anti-glare Rating	Accessory options		
Service Lifetime	50.000 Hrs L80 B20 Ta35		
Ingress Protection	IP66		
Operation Voltage	100-264VAC, 50Hz		24VDC
Operation Temperature	-30°C ~ 50°C		
Frame	Aluminum		
Finishing	Dark Grey, Matt Black or Option		
Lighting control (option)	Dali, 0-10V, Triac, Wireless, DMX512		

### Accessories

Ground Spike & Honeycomb can be optionally sold separately

### Notes

-