



RZ0668SNF




Side Bend Neon Flexible Led Strip 6W/m 300lm CRI90 24VDC 50.000h IP68

RZ1068SNF

Side Bend Neon Flexible Led Strip 10W/m 500lm CRI90 24VDC 50.000h IP68

RZ1568SNF

Side Bend Neon Flexible Led Strip 15W/m 750lm CRI90 24VDC 50.000h IP68

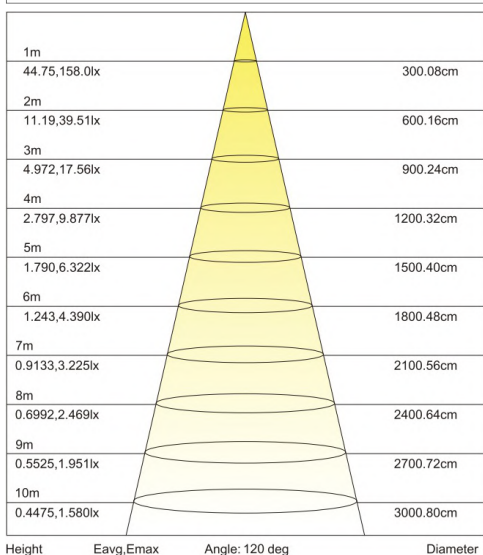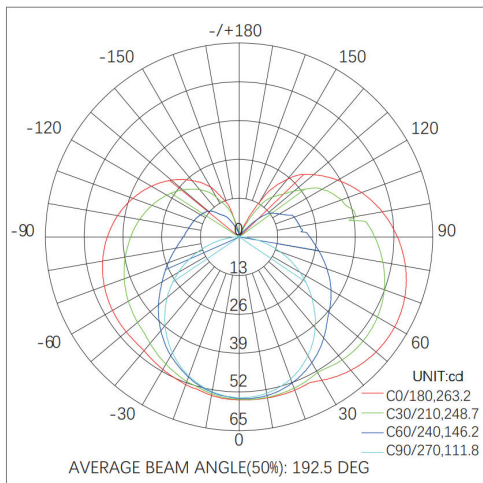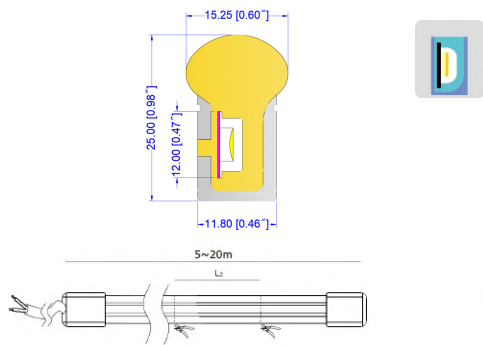

Description

LED Strip, adopting self-encapsulated LED, highlight SMD, silicone extrusion, flexible FPC. High-energy efficacy achieving up to 100lm/W, 3 steps MacAdam, soft light to perfectly present the object without black spot and dark area. Anti-UV grade UVA-340. No need to attach aluminum profile for heat sink, various of connection accessories can be optionally sold separately. Customized length available up to [10m] 20m per roll. Change atmosphere by tuning the color temperature (2000K to 6000K) and dimming control systems are for choice. Short cuttable unit suitable for furniture lighting, and for unpredictable requirements on site, applying to indoor and outdoor lighting, furniture, advertisement and other supporting usages. Protections grades of IP67 and IP68 can be achieved by adopting silicone integrated extrusion, nano coating and other protection processes.



Technical data

Light source	LED SMD		
System Wattage	6W/m	10W/m	15W/m
Luminous flux	300lm/m	500lm/m	750lm/m
Luminous efficiency	50lm/w or option up to 70lm/w		
Colour Temperature	2700K, 3000K, 4000K, 6000K, [24K+60K], RGB[W]		
Colour Rendering Index	CRI>90; [CRI95]		
Colour Deviation	SDCM<3		
Beam Angle	193°		
Max.Length	5-20m		
Cut length	50mm		
Led/m	-		
Anti-glare Rating	-		
Service Lifetime	50.000 Hrs L70 B20 Ta25		
Ingress Protection	IP68		
Operation Voltage	24VDC		
Operation Temperature	-20°C ~ 45°C		
Lighting control (option)	Dali, 0-10V, Triac, DMX, Wireless		

Accessories



Notes

-