

Model	Dimension	Cut-out
RZ0755RW	D64*H59mm	55mm
RZ1575RW	D86*H78mm	75mm
RZ2595RW	D106*H92mm	95mm

RZ0755RW

Wall Washer Recessed Downlight Led 7W 595lm CRI90 D64 50.000h White IP44

RZ1575RW

Wall Washer Recessed Downlight Led 15W 1275lm CRI90 D86 50.000h White IP44

RZ2595RW


Wall Washer Recessed Downlight Led 25W 2125lm CRI90 D106 50.000h White IP44

Description

Housing: Cast aluminium, Wall Washer, designed as heat sink, with connection cable. 0°-25° tilt. Fixing ring: Matt White, Matt Black, Customized.
 Mounting ring: white. Expanding spring fixing for ceiling thicknesses of 5-25mm. Includes control gear with Led driver separate. 2-pole terminal block.
 LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Tender and soft light to perfectly present the object without black spot and dark area.
 Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless.
 Darklight reflector: Polymethyl, Chrome, Matt White, Matt Black, Customized. High quality optical diffuser reduce LED dazzle light. Optical cut-off 40°. Deep anti-glare design, protect the eye.
 Protection Class III.



Technical data

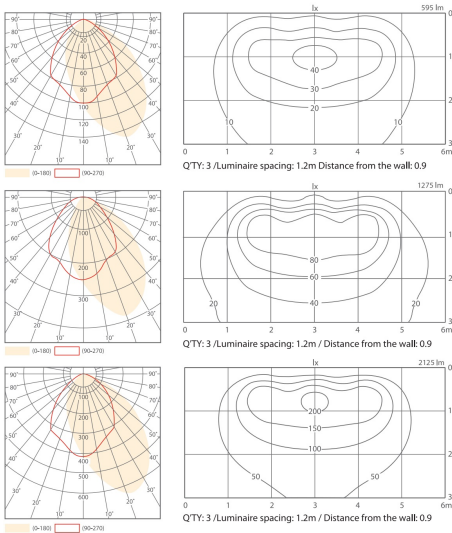

Light source	LED COB		
System Wattage	7W	15W	25W
Luminous flux	595lm	1275lm	2125lm
Luminous efficiency	85lm/w or option		
Colour Temperature	2700K, 3000K, 4000K, 6000K		
Colour Rendering Index	CRI>90		
Colour Deviation	SDCM<3		
Beam Angle	Wall Washer		
Cut-Off Angle	-		
Tilt Angle	-		
Anti-glare Rating	UGR<19		
Service Lifetime	50.000 Hrs L70 B20 Ta25		
Ingress Protection	IP44		
Operation Voltage	220-240VAC, 50Hz		
Operation Temperature	-20°C ~ 45°C		
Frame	Aluminum		
Finishing	Matt White, Matt Black		
Lighting control (option)	Dali, 0-10V, Triac, Wireless		

Accessories

-

Notes

-

