

### RZ100HB

UFO Highbay Light With Die Casting Aluminum Led 100W 15000lm CRI80 220VAC 75.000h D280\*H155mm IP65 IK08



### RZ150HB

UFO Highbay Light With Die Casting Aluminum Led 150W 22500lm CRI80 220VAC 75.000h D300\*H172mm IP65 IK08

### RZ180HB

UFO Highbay Light With Die Casting Aluminum Led 180W 27000lm CRI80 220VAC 75.000h D320\*H192mm IP65 IK08



### Description

Housing: Die-cast Aluminum with inner aluminum heatsink, High transmittance and better thermal conductivity. The Led shell adopts optical polar PC materials, which ensures the light even, high transmittance. Instant start, no flickering, no humming, no hazardous material.



The ends where cable comes out, there are with waterproof PG connections, it secures the cable and keep water and dust from entering.

Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless, Microwave motion sensor and Emergency.

Long life span, more than 50,000 hours, greatly reduce the cost of light source replacement and maintenance.


Buckle design is easy for ceiling mounting and suspension, with optional accessory kit sold separately.

IP65 waterproof, dust-proof and anti-corrosion, smooth appearance, easy to clean.

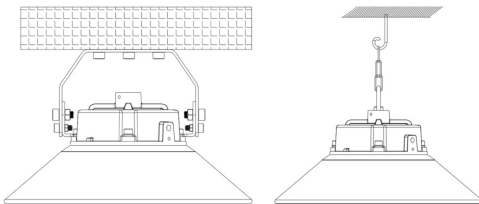


### Technical data

Light source	LED SMD		
System Wattage	100W	150W	180W
Luminous flux	15000lm	22500lm	27000lm
Luminous efficiency	150lm/w or option		
Colour Temperature	2700K, 3000K, 4000K, 5000K, 6000K, 6500K		
Colour Rendering Index	CRI>80		
Colour Deviation	SDCM<5		
Beam Angle	60°, 90°, 120°		
Cut-Off Angle	-		
Tilt Angle	-		
Anti-glare Rating	-		
Service Lifetime	75.000 Hrs L70 B30 Ta25		
Ingress Protection	IP65 IK08		
Operation Voltage	100-240VAC, 50Hz		
Operation Temperature	-30°C ~ 50°C		
Frame	Aluminum		
Net Weight	2.2kg	3.2kg	4.2kg
Finishing	Matt Black		
Lighting control (option)	Dali, 0-10V, Triac, Wireless, Sensor		

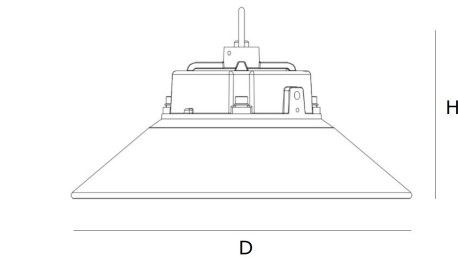

Model	Dimensions
RZ100HBA	D280*H155mm
RZ150HBA	D300*H172mm
RZ180HBA	D320*H192mm

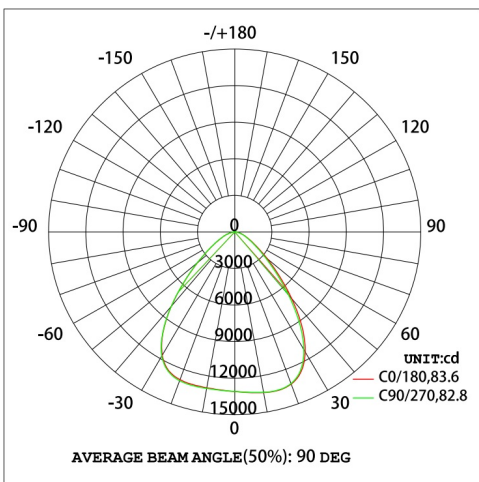

### Accessories

### Notes