

RZ0666SMF

Surface Mounted Up-Light With Die-casting Aluminum Led 6W 480lm CRI80 Diffused 220VAC 120*150*L320mm 50.000h IP66



RZ1266SMF


Surface Mounted Up & Down Light With Die-casting Aluminum Led 12W 960lm CRI80 Diffused 220VAC 120*150*L320mm 50.000h

RZ2066SMF

Surface Mounted Up-Light With Die-casting Aluminum Led 20W 1600lm CRI80 Asymmetric 220VAC 120*150*L320mm 50.000h IP66

RZ3666SMF

Surface Mounted Up & Down Light With Die-casting Aluminum Led 36W 2880lm CRI80 Asymmetric 220VAC 120*150*L320mm 50.000h IP66

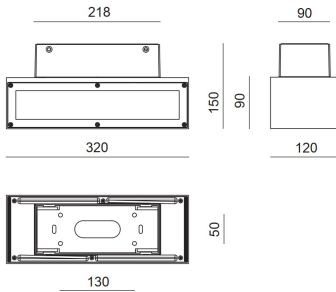

Description

Housing and wall fixture: Die-casting Aluminum, Pre-treated before powder coating ensuring high corrosion resistance, No-Rinse surface treatment. Optimised surface for reduced accumulation of dirt, with a high level of weather resistance. Durable silicone rubber gasket. Tamper-proof screw.


Surface mounting box for easy wiring or conduit connection when wiring from behind is not possible. Luminaire head with transparent toughened non-reflective glass, resist the impact and friction.

Control gear: 1 cable entries. 3-pole terminal block.


LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Tender and soft light to perfectly present the object without black spot and dark area.

Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless.

Protection mode IP65: dust-proof and water jet-proof.



Diffused

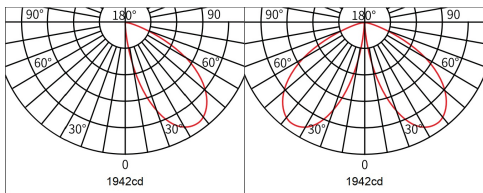

Asymmetric

Technical data

Light source	LED SMD			
System Wattage	6W	12W		20W 36W
Luminous flux	480lm	960lm		1600lm 2880lm
Number of led lamp	-			
Luminous efficiency	80lm/w or option			
Colour Temperature	2700K, 3000K, 4000K, 6000K			
Colour Rendering Index	CRI>80, [CRI>90]			
Colour Deviation	SDCM<3			
Beam Angle	Diffused		Asymmetric	
Rotation Angle	-			
Anti-glare Rating	-			
Service Lifetime	50.000 Hrs L80 B20 Ta35			
Ingress Protection	IP65			
Operation Voltage	100-240VAC, 50Hz		24VDC	
Operation Temperature	-30°C ~ 50°C			
Frame	Aluminum			
Finishing	Grey Color, Matt White, Matt Black or Option			
Lighting control (option)	Dali, 0-10V, Triac, Wireless			

Accessories

-

Notes

-

