




105*105*H100

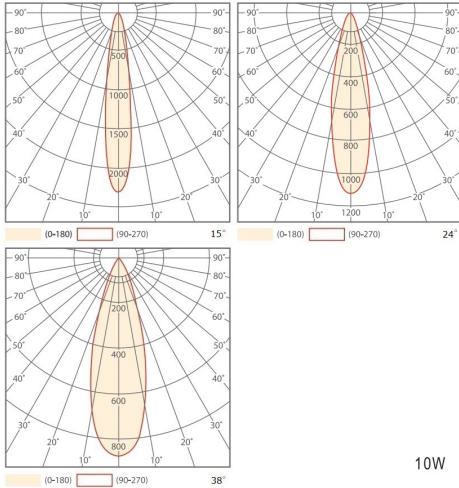

RZ10ASM


Square Surface Mounted Adjustable Downlight Led 10W 850lm CRI90 105*105*H100mm 50.000h IP44

RZ20ASM

Double Square Surface Mounted Adjustable Downlight Led 2*10W 1700lm CRI90 105*203*H100mm 50.000h IP44



105*203*H100

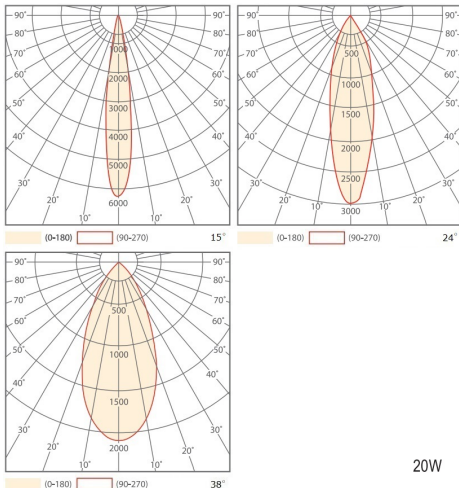

Description

Designed for shallow ceiling void. With the modularized system, it's easy to use and easy to maintain.

Housing: cast aluminium, powder-coated, connection cable. Ceiling fixture: metal. Includes control gear with Led driver. 2-pole terminal block.

LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Tender and soft light to perfectly present the object without black spot and dark area.

Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless.

Anti-glare cone with covered mounting detail: Polymethyl, Chrome, Matt White, Matt Black, Customized. High quality optical diffuser reduce LED dazzle light. Cut-off angle 30° with Anti-glare Rating UGR<19.



Technical data

Light source	LED COB	
System Wattage	10W	2*10W
Luminous flux	850lm	1700lm
Luminous efficiency	85lm/w or option	
Colour Temperature	2700K, 3000K, 4000K, 6000K	
Colour Rendering Index	CRI>90	
Colour Deviation	SDCM<3	
Beam Angle	15°, 24°, 38°	
Cut-Off Angle	-	
Tilt Angle	-	
Anti-glare Rating	UGR<19	
Service Lifetime	50.000 Hrs L70 B20 Ta25	
Ingress Protection	IP44	
Operation Voltage	220-240VAC, 50Hz	
Operation Temperature	-20°C ~ 45°C	
Frame	Aluminum	
Finishing	Matt White, Matt Black	
Lighting control (option)	Dali, 0-10V, Triac, Wireless	

Accessories

-

Notes

-