

RZ60SL

Street Light With Die-Cast Aluminum and Tempered Glass Led 60W 8400lm CRI80 220VAC 10KV SPD 75.000h IP66 IK09

RZ90SL

Street Light With Die-Cast Aluminum and Tempered Glass Led 90W 12600lm CRI80 220VAC 10KV SPD 75.000h IP66 IK09

RZ120SL

Street Light With Die-Cast Aluminum and Tempered Glass Led 120W 16800lm CRI80 220VAC 10KV SPD 75.000h IP66 IK09

RZ150SL

Street Light With Die-Cast Aluminum and Tempered Glass Led 150W 21000lm CRI80 220VAC 10KV SPD 75.000h IP66 IK09

RZ180SL

Street Light With Die-Cast Aluminum and Tempered Glass Led 180W 25200lm CRI80 220VAC 10KV SPD 75.000h IP66 IK09

RZ210SL

Street Light With Die-Cast Aluminum and Tempered Glass Led 210W 29400lm CRI80 220VAC 10KV SPD 75.000h IP66 IK09

RZ240SL

Street Light With Die-Cast Aluminum and Tempered Glass Led 240W 31200lm CRI80 220VAC 10KV SPD 75.000h IP66 IK09

Description

Housing: Fashionable die-cast Aluminum with high thermal conductivity aluminum plate, lead away heat quickly. Use high quality LEDs and power supply to ensure the product reliability and life expectancy.

Professional light distributions with various beam angles available.

Separating lamp body from LED driver, keep low temperature of LED Driver for longer lifetime.

The ends where cable comes out, there are with waterproof PG connections, it secures the cable and keep water and dust from entering.

Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless, Microwave motion sensor.


10KV lightning protector, respirator, installation gradienter and open protection switch for easy installation and safety protection.

IP66 waterproof, dust-proof and anti-corrosion, to meet all kinds of harsh outdoor environments.



Technical data

Light source	LED SMD
System Wattage	60W 90W 120W 150W 180W 210W 240W
Luminous flux	8400lm - 31200lm
Luminous efficiency	140lm/w or option
Colour Temperature	2700K, 3000K, 4000K, 5000K, 6000K, 6500K
Colour Rendering Index	CRI80
Colour Deviation	SDCM<5
Beam Angle	160° - 90*90°
Service Lifetime	75.000 Hrs L70 B20 Ta35
Ingress Protection	IP66 IK09
Operation Voltage	220-240VAC, 50Hz
Operation Temperature	-30°C ~ 50°C
Frame	Aluminum
Finishing	Grey, Silver or Option
Lighting control (option)	Dali, 0-10V, Triac, Wireless, Sensor

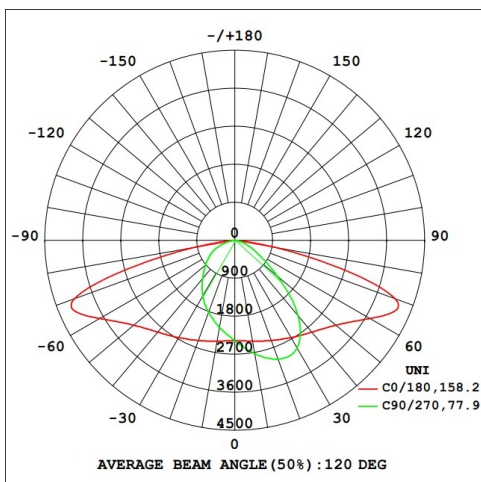

Accessories