

RZ08SM

Waterproof Surface Mounted Light Led 8W 880lm CRI80 220VAC D147*H53mm 50.000h IP65

RZ12SM

Waterproof Surface Mounted Light Led 12W 1320lm CRI80 220VAC D220*H65mm 50.000h IP65

RZ18SM


Waterproof Surface Mounted Light Led 18W 1980lm CRI80 220VAC D275*H75mm 50.000h IP65

RZ24SM

Waterproof Surface Mounted Light Led 24W 2640lm CRI80 220VAC D300*H85mm 50.000h IP65

RZ30SM

Waterproof Surface Mounted Light Led 30W 3300lm CRI80 220VAC D350*H85mm 50.000h IP65

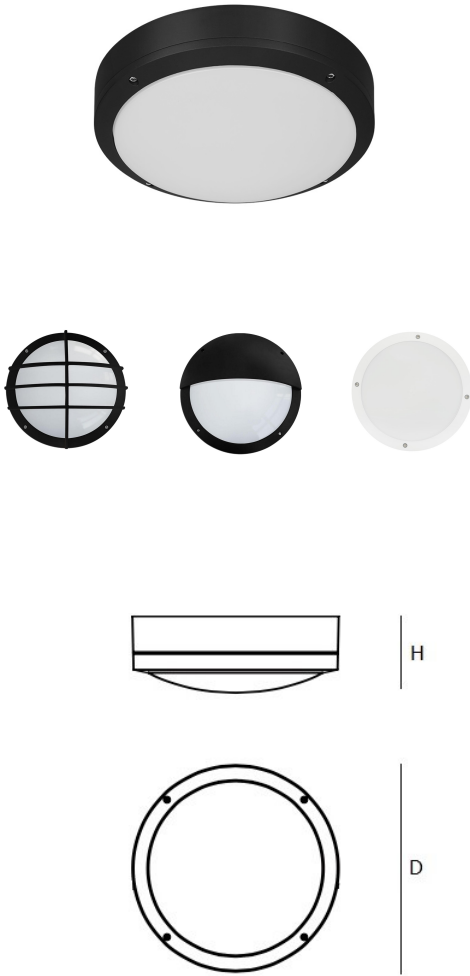

Description

Housing: Die-casting Aluminium, powder-coated. Optimised surface for reduced accumulation of dirt, inner aluminum heatsink, High transmittance and better thermal conductivity. The outer shell adopts optical polar PC materials double-color, which ensures the light even, soft and high transmittance. Instant start, no flickering, no humming, no hazardous material.

Control gear. 2 cable entries. Through-wiring possible.

Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless.


IP65 waterproof, dust-proof.



Technical data

Light source	LED SMD				
System Wattage	8W	12W	18W	24W	30W
Luminous flux	880lm	1320lm	1980lm	2640lm	3300lm
Luminous efficiency	110lm/w or option				
Colour Temperature	2700K, 3000K, 4000K, 5000K, 6000K				
Colour Rendering Index	CRI>80				
Colour Deviation	SDCM<3				
Beam Angle	120°				
Cut-Off Angle	-				
Tilt Angle	-				
Anti-glare Rating	UGR<19				
Service Lifetime	50.000 Hrs L70 B20 Ta25				
Ingress Protection	IP65				
Operation Voltage	220-240VAC, 50Hz				
Operation Temperature	-30°C ~ 50°C				
Frame	Aluminum housing & PC diffuser				
Finishing	Matt White, Matt Black				
Lighting control (option)	Dali, 0-10V, Triac, Wireless				

Model	Dimensions
RZ08SM	D147*H53mm
RZ12SM	D220*H65mm
RZ18SM	D275*H75mm
RZ24SM	D300*H85mm
RZ30SM	D350*H85mm

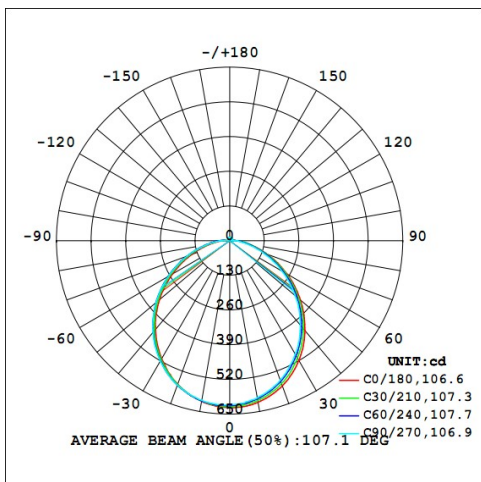

Accessories

-

Notes

-