



RZ0755FR

Recessed Fixed Downlight With Anti-Glare Reflector Led 7W 595lm CRI90 D64 50.000h White IP44



Model	Dimension	Cut-out
RZ0755FR	D64*H59mm	55mm
RZ1575FR	D86*H78mm	75mm
RZ2595FR	D106*H92mm	95mm

RZ1575FR

Recessed Fixed Downlight With Anti-Glare Reflector Led 15W 1275lm CRI90 D86 50.000h White IP44

RZ2595FR

Recessed Fixed Downlight With Anti-Glare Reflector Led 25W 2125lm CRI90 D106 50.000h White IP44


Description

Housing: Cast aluminium, Fixed, designed as heat sink, with connection cable. 0°-25° tilt.
 Fixing ring: Matt White, Matt Black, Customized.
 Mounting ring: white. Expanding spring fixing for ceiling thicknesses of 5-25mm. Includes control gear with Led driver separate. 2-pole terminal block.
 LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Tender and soft light to perfectly present the object without black spot and dark area.
 Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless.
 Anti-glare cone with covered mounting detail: Polymethyl, Chrome, Shining Silver, Matt White, Matt Black, Customized. High quality optical diffuser reduce LED dazzle light. Optical cut-off 40°. Deep anti-glare design, protect the eye.
 Protection Class III.



Technical data

Light source	LED COB		
System Wattage	7W	15W	25W
Luminous flux	595lm	1275lm	2125lm
Luminous efficiency	85lm/w or option		
Colour Temperature	2700K, 3000K, 4000K, 6000K		
Colour Rendering Index	CRI>90		
Colour Deviation	SDCM<3		
Beam Angle	15°, 24°, 38°		
Cut-Off Angle	40°		
Tilt Angle	-		
Anti-glare Rating	UGR<16		
Service Lifetime	50.000 Hrs L70 B20 Ta25		
Ingress Protection	IP44		
Operation Voltage	220-240VAC, 50Hz		
Operation Temperature	-20°C ~ 45°C		
Frame	Aluminum		
Finishing	Matt White, Matt Black		
Lighting control (option)	Dali, 0-10V, Triac, Wireless		

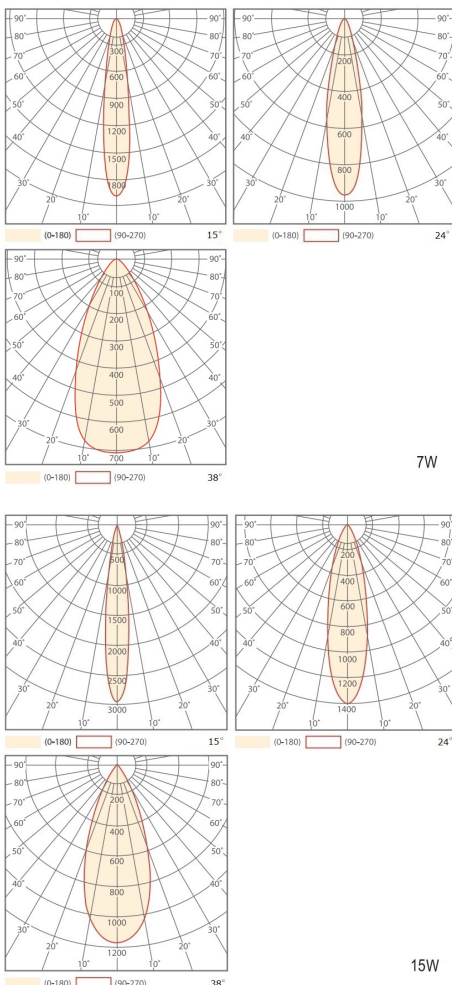

Accessories

Notes