



### RZ1406BT

Batten Light Led 14W 1680lm CRI80 120° L600 50.000h White IP20

### RZ2812BT


Batten Light Led 28W 3360lm CRI80 120° L1200 50.000h White IP20

### RZ3815BT

Batten Light Led 38W 4560lm CRI80 120° L1500 50.000h White IP20



Model	Dimensions
RZ1406BT	L600mm
RZ2812BT	L1200mm
RZ3815BT	L1500mm

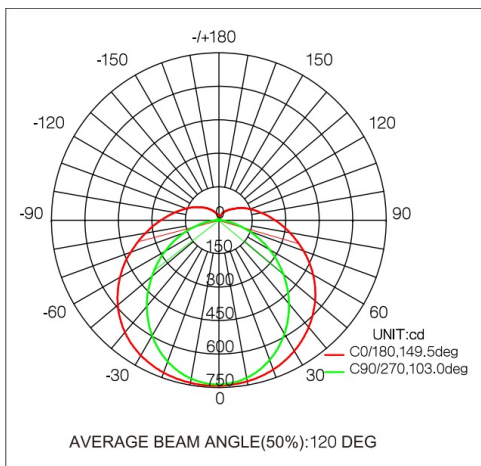

### Description

Housing: Full polycarbonate housing with inner aluminum heatsink, High transmittance and better thermal conductivity. The LEDs are housed in a slim opal diffuser, which ensures the light even, soft and high transmittance. Instant start, no flickering, no humming, no hazardous material.

Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless, Microwave motion sensor and Emergency.

Long life span, more than 50,000 hours, greatly reduce the cost of light source replacement and maintenance.

Buckle design is easy for ceiling mounting and suspension, with optional accessory kit sold separately.



### Technical data

Light source	LED SMD		
System Wattage	14W [L600]	28W [L1200]	38W [L1500]
Luminous flux	1680lm	3360lm	4560lm
Luminous efficiency	120lm/w or option		
Colour Temperature	2700K, 3000K, 4000K, 6000K		
Colour Rendering Index	CRI>80		
Colour Deviation	SDCM<3		
Beam Angle	120°		
Cut-Off Angle	-		
Tilt Angle	-		
Anti-glare Rating	UGR<21		
Service Lifetime	50.000 Hrs L70 B20 Ta25		
Ingress Protection	IP20		
Operation Voltage	220-240VAC, 50Hz		
Operation Temperature	-20°C ~ 45°C		
Frame	Aluminum & PMMA		
Finishing	Matt White		
Lighting control (option)	Dali, 0-10V, Triac, Wireless		

### Accessories

-

### Notes

-

