

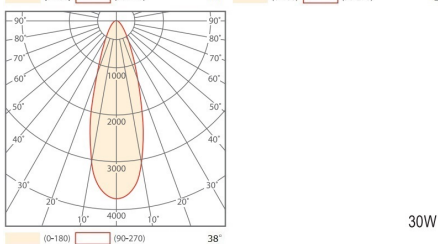
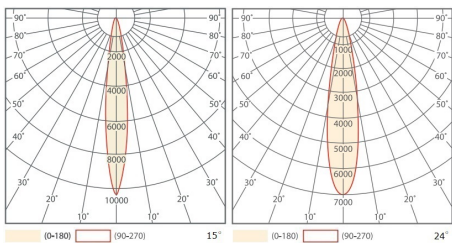


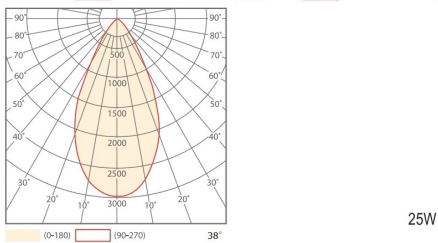

Model	Dimension	Model	Dimension
RZ07WSM	D75*H100	RZ25WSM	D115*H152
RZ09WSM	D75*H100	RZ30WSM	D115*H152
RZ12WSM	D95*H100	RZ40WSM	D140*H162
RZ15WSM	D95*H100	RZ50WSM	D170*H182
RZ20WSM	D95*H152	RZ60WSM	D205*H212

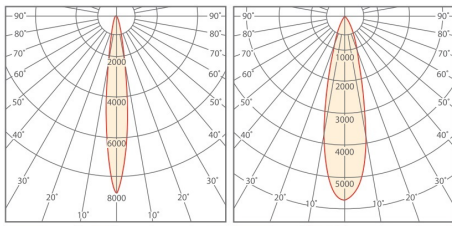

RZ25WSM

Round Surface Mounted Fixed Downlight With Anti-Glare Reflector Waterproof Led 25W 2125lm CRI90 D115*H152 50.000h IP65

RZ30WSM

Round Surface Mounted Fixed Downlight With Anti-Glare Reflector Waterproof Led 30W 2550lm CRI90 D115*H152 50.000h IP65

RZ40WSM

Round Surface Mounted Fixed Downlight With Anti-Glare Reflector Waterproof Led 40W 3400lm CRI90 D140*H162 50.000h IP65

RZ50WSM

Round Surface Mounted Fixed Downlight With Anti-Glare Reflector Waterproof Led 50W 4250lm CRI90 D170*H182 50.000h IP65

RZ60WSM

Round Surface Mounted Fixed Downlight With Anti-Glare Reflector Waterproof Led 60W 5100lm CRI90 D205*H212 50.000h IP65

Description

Designed for shallow ceiling void. With the modularized system, it's easy to use and easy to maintain.

Housing: cast aluminium, powder-coated, connection cable. Ceiling fixture: metal. Includes control gear with Led driver. 2-pole terminal block.

LED module: High-power LEDs on metal-core PCB. Collimating lens made of optical Polymethyl. Tender and soft light to perfectly present the object without black spot and dark area.

Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless.

Anti-glare cone with covered mounting detail: Polymethyl, Chrome, Matt White, Matt Black, Customized. High quality optical diffuser reduce LED dazzle light. Cut-off angle 38° with Anti-glare Rating UGR<16.

Protection mode IP65: dust-proof and water jet-proof.



Technical data

Light source	LED COB
System Wattage	25W 30W 40W 50W 60W
Luminous flux	2125lm 2550lm 3400lm 4250lm 5100lm
Luminous efficiency	85lm/w or option
Colour Temperature	2700K, 3000K, 4000K, 6000K
Colour Rendering Index	CRI>90
Colour Deviation	SDCM<3
Beam Angle	15°, 24°, 38°
Cut-Off Angle	38°
Tilt Angle	-
Anti-glare Rating	UGR<16
Service Lifetime	50.000 Hrs L70 B20 Ta25
Ingress Protection	IP44
Operation Voltage	220-240VAC, 50Hz
Operation Temperature	-20°C ~ 45°C
Frame	Aluminum
Finishing	Matt White, Matt Black
Lighting control (option)	Dali, 0-10V, Triac, Wireless

Accessories

-

Notes

-