

RZ2006TTP

Tubular Tri-Proof Light Led 20W 2400lm CRI80 150° L600 50.000h White IP66 IK09

RZ4012TTP

Tubular Tri-Proof Light Led 40W 4800lm CRI80 150° L1200 50.000h White IP66 IK09

RZ6015TTP

Tubular Tri-Proof Light Led 60W 7200lm CRI80 150° L1500 50.000h White IP66 IK09



Description

Housing: Full polycarbonate housing with inner aluminum heatsink, High transmittance and better thermal conductivity. The outer shell adopts optical polar PC materials double-color, which ensures the light even, soft and high transmittance. Instant start, no flickering, no humming, no hazardous material.

The ends where cable comes out, there are with waterproof PG connections for seamless connections, it secures the cable and keep water and dust from entering. And there is breathable valve on end caps to keep inside and outside pressure balance, then it is good for long time waterproof protection.

Dimming driver can be optionally sold separately: Dali, 0-10V, Triac, Wireless, Microwave motion sensor and Emergency.

Long life span, more than 50,000 hours, greatly reduce the cost of light source replacement and maintenance.


Buckle design is easy for ceiling mounting and suspension, with optional accessory kit sold separately.

IP66 waterproof, dust-proof and anti-corrosion.




Technical data

Light source	LED SMD		
System Wattage	20W [L600]	40W [L1200]	60W [L1500]
Luminous flux	2400lm	4800lm	7200lm
Luminous efficiency	120lm/w or option		
Colour Temperature	2700K, 3000K, 4000K, 6000K		
Colour Rendering Index	CRI>80		
Colour Deviation	SDCM<3		
Beam Angle	150°		
Cut-Off Angle	-		
Tilt Angle	-		
Anti-glare Rating	UGR<19		
Service Lifetime	50.000 Hrs L70 B20 Ta25		
Ingress Protection	IP66 IK09		
Operation Voltage	220-240VAC, 50Hz		
Operation Temperature	-20°C ~ 45°C		
Frame	Aluminum & PMMA		
Finishing	Matt White		
Lighting control (option)	Dali, 0-10V, Triac, Wireless		



Model	Dimensions
RZ2006TTP	L600*D78.5mm
RZ4012TTP	L1200*D78.5mm
RZ6015TTP	L1500*D78.5mm

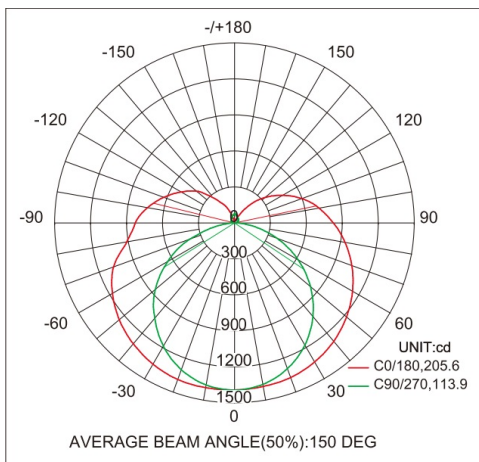

Accessories

Notes