


RZ5570CL12

CCT Tunable Linear Light Fixture Rigid Bar 22W 2200lm CRI90 50.000h 2700K~6000K 96° RF 2.4G CCT Tunable Driver AC 100-240V 50/60Hz L1230mm With PC Cover Silvery Color IP40

RZ5570CL24

CCT Tunable Linear Light Fixture Rigid Bar 44W 4400lm CRI90 50.000h 2700K~6000K 96° RF 2.4G CCT Tunable Driver AC 100-240V 50/60Hz L2450mm With PC Cover Silvery Color IP40

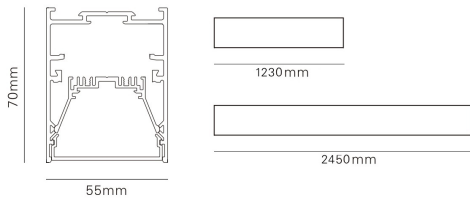

Description

Linear direct and indirect light luminaire with housing made of anodised aluminium profile with matt or textured paint finish.

Frosted diffuser for direct light and clear diffuser for indirect light with user friendly clipping system. Aluminium end caps.

Separate Circuits.

Suspension and connection accessories available can be optionally sold separately. Supply base made of aluminium, clear power cable and steel suspension cables with millimetric height adjustment system.


High-energy efficacy achieving up to 100lm/W, 3 steps MacAdam, soft light to perfectly present the object without black spot and dark area.

Support 0-10V, PWM and Resistor dimming solution, expand connection with lighting control devices according to your needs with dimming and hold time on and off or constant illuminance hold-time on and off photosensitive module.



Technical data

Light source	LED SMD	
System Wattage	22W	44W
Luminous flux	2200lm	4400lm
Luminous efficiency	100lm/w or option	
Colour Temperature	2700K~6000K	
Colour Rendering Index	CRI>90	
Colour Deviation	SDCM<3	
Beam Angle	96°	
Anti-glare Rating	UGR<19	
Service Lifetime	50.000 Hrs L70 B20 Ta25	
Ingress Protection	IP40	
Operation Voltage	220-240VAC, 50Hz	
Operation Temperature	-20°C ~ 45°C	
Frame	Aluminum	
Installation way	Pendant, Recessed, Surface, Wall mounted	
Finishing	Silver, Matt White, Matt Black	
Dimming range	0-100% with RF 2.4G integrated Tunable White	
Lighting control (option)	Dali, 0-10V, Wireless	

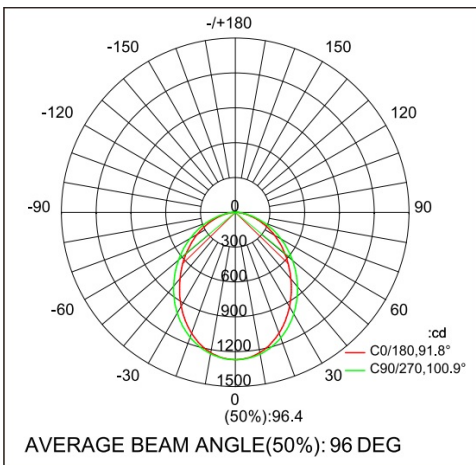

2m	134.7,318.6lx	413.00cm
4m	33.68,79.65lx	826.01cm
6m	14.97,35.40lx	1239.01cm
8m	8.419,19.91lx	1652.02cm
10m	5.388,12.74lx	2065.02cm

Height Eavg,Emax Diameter

Accessories



Notes

-