
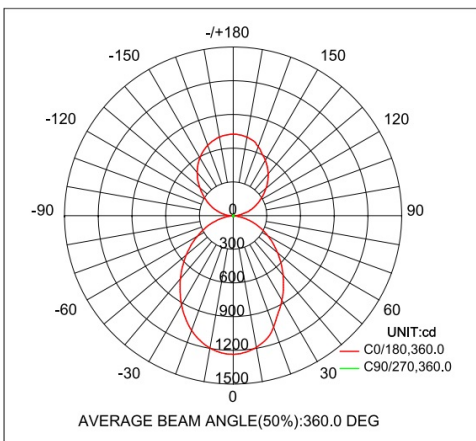
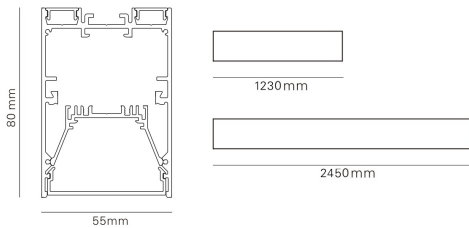


RZ5580DL12

Up & Down Linear Light Fixture Led Rigid Bar 45W 4500lm [Up 18W 1800lm Down 27W 2700lm] CRI90 50.000h 96° 3-in-1 Dimmable Driver (0~10V, Resistor and PWM) AC 100-277VAC L1230mm With PC Cover Silvery Color IP40

RZ5580DL24

Up & Down Linear Light Fixture Led Rigid Bar 90W 9000lm [Up 36W 3600lm Down 54W 5400lm] CRI90 50.000h 96° 3-in-1 Dimmable Driver (0~10V, Resistor and PWM) AC 100-277VAC L2450mm With PC Cover Silvery Color IP40

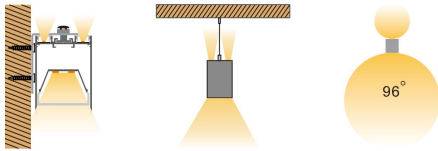

Description

Linear direct and indirect light luminaire with housing made of anodised aluminium profile with matt or textured paint finish.

Frosted diffuser for direct light and clear diffuser for indirect light with user friendly clipping system. Aluminium end caps.

Separate Circuits.

Suspension and connection accessories available can be optionally sold separately. Supply base made of aluminium, clear power cable and steel suspension cables with millimetric height adjustment system.

High-energy efficacy achieving up to 100lm/W, 3 steps MacAdam, soft light to perfectly present the object without black spot and dark area.

Support 0-10V, PWM and Resistor dimming solution, expand connection with lighting control devices according to your needs with dimming and hold time on and off or constant illuminance hold-time on and off photosensitive module.



Technical data

| | |
|---------------------------|--|
| Light source | LED SMD |
| System Wattage | 45W [Up 18W 1800lm Down 27W 2700lm] 90W [Up 36W 3600lm Down 54W 5400lm] |
| Luminous flux | 4500lm 9000lm |
| Luminous efficiency | 100lm/w or option |
| Colour Temperature | 2700K, 3000K, 4000K, 5000K, 6000K |
| Colour Rendering Index | CRI>90 |
| Colour Deviation | SDCM<3 |
| Beam Angle | 96° |
| Anti-glare Rating | UGR<19 |
| Service Lifetime | 50.000 Hrs L70 B20 Ta25 |
| Ingress Protection | IP40 |
| Operation Voltage | 220-240VAC, 50Hz |
| Operation Temperature | -20°C ~ 45°C |
| Frame | Aluminum |
| Installation way | Pendant, Recessed, Surface, Wall mounted |
| Finishing | Silver, Matt White, Matt Black |
| Dimming range | 1-100% with 0-10V Driver integrated |
| Lighting control (option) | Dali, 0-10V, Wireless |

Accessories



Notes

-

