





D523



537

ID76

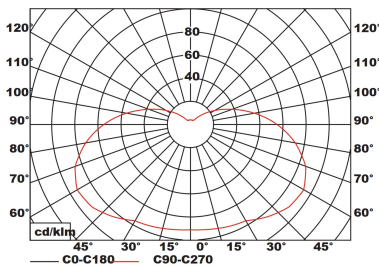

RZ25UGC

Urban Garden With Die-cast Aluminum housing, Glass Transparent Diffuser Cover Led 25W 2500lm CRI80 100.000h 220VAC D523*H537mm IP66 IK08

RZ35UGC

Urban Garden With Die-cast Aluminum housing, Glass Transparent Diffuser Cover Led 35W 3500lm CRI80 100.000h 220VAC D523*H537mm IP66 IK08

RZ60UGC

Urban Garden With Die-cast Aluminum housing, Glass Transparent Diffuser Cover Led 60W 6000lm CRI80 100.000h 220VAC D523*H537mm IP66 IK08

Description

Urban Pole Light, designed to use monochrome LED lamps. It consists of a body, an optical assembly and a fixing base.

Housing, pole and base plate: Corrosion-resistant Extruded Aluminum. Optimised surface for reduced accumulation of dirt. Double powder-coated. Durable silicone rubber gasket. Base plate for mounting on ground socket, concrete anchor or mounting plate.

Smooth round decorative ambient lighting post top with clear PMMA diffuser.

Pole and Mounting accessories to be ordered separately.

Control gear: 1 cable entries. 3-pole terminal block.

LED module: high-power LEDs on metal-core PCB.

Protection mode IP66: dust-proof and water jet-proof.

Maximum wind load resistance is 160km/h.



Technical data

Light source	LED SMD		
System Wattage	25W	35W	60W
Luminous flux	2500lm	3500lm	6000lm
Number of led lamp	-		
Luminous efficiency	100lm/w or option		
Colour Temperature	3000K, 4000K, 5000K		
Colour Rendering Index	CRI>80		
Colour Deviation	SDCM<5		
Beam Angle	Diffused		
Rotation Angle	-		
Anti-glare Rating	-		
Service Lifetime	100.000 Hrs L70 B30 Ta35		
Ingress Protection	IP66		
Operation Voltage	100-264VAC, 50Hz		
Operation Temperature	-40°C ~ 60°C		
Frame	Aluminum		
Finishing	Matt Black or Option		
Lighting control (option)	Dali, 0-10V, Triac, Wireless		

Accessories

-

Notes

-

