


### ADF-WL0076S

Square Surface Mounted Down-Light Led 8W 640lm 220VACIP65



### ADF-WL0076

Square Surface Mounted Up-Down Light Led 2\*4W 640lm220VAC IP65

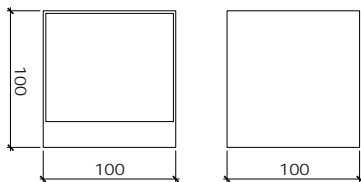

### Description

Housing and wall fixture: Metal or cast aluminum, Pre-treated before powder coating ensuring high corrosion resistance, No-Rinse surface treatment. Optimised surface for reduced accumulation of dirt, with a high level of weather resistance. Durable siliconerubber gasket. Tamper-proof screw.  
Surface mounting box for easy wiring or conduit connection when wiring from behind is not possible.  
Control gear: 1 cable entries. 3-pole terminal block.  
LED module: high-power LEDs on metal-core PCB  
Dimming driver can be optionally sold separately: Dali, 0-10V, Wireless.  
Protection mode IP65: dust-proof and water jet-proof.



### Technical data

Light source	LED COB	
System Wattage	8W	2*4W
Luminous flux	640lm	640lm
Number of led lamp	-	
Luminous efficiency	80lm/w or option	
Colour Temperature	2700K, 3000K, 4000K, 6000K	
Colour Rendering Index	CRI>80	
Colour Deviation	SDCM<3	
Beam Angle	Diffused	
Rotation Angle	-	
Anti-glare Rating	-	
Service Lifetime	50.000 Hrs L70 B30 Ta25	
Ingress Protection	IP65	
Operation Voltage	220-240VAC, 50Hz	
Operation Temperature	-30°C ~ 50°C	
Frame	Metal	
Finishing	Black, White, Grey or option	
Lighting control (option)	Dali, 0-10V, Triac, Wireless	

### Accessories

-

### Notes

-

