

### RZ5570-YNA

Hold time on and off photosensitive module, rated power 400W, detection sensitivity 10%/ 50%/ 75%/ 100%; hold time 5s/ 30s/ 90s/ 3min/ 20min/ +∞; daylight sensor 2lux/ 5lux/ 10lux/ 25lux/ 50lux/ 100lux/ disable; standby period 0s/ 5s/ 5min/ 10min/ 30min/ 1h/ +∞; standby dimming level 10%/ 20%/ 30%/ 50%



### Description



Linear direct and indirect light luminaire with housing made of anodised aluminium profile with matt or textured paint finish.

The constant value (lux) of illuminance could be adjusted freely to satisfy different requests.

Lighting fixtures are adjusted automatically according to constant illuminance value.


Compatible to lighting fixture with 0-10V dimming function. Expand connection with Linear Light according to your needs with dimming and photosensitive module.

Suspension and connection accessories available can be optionally sold separately.

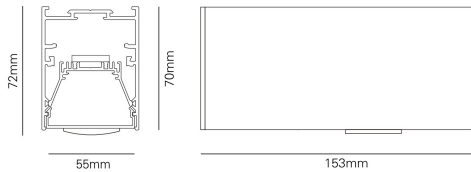


### Technical data

Rated power	400W
Detection radius	6m
Max installation height	12m
Detection angle	150°
constant illuminance range	-
Detection sensitivity	10% / 50% / 75% / 100%
Hold time	5s / 30s / 90s / 3min / 20min / +∞
Daylight sensor	2lux/ 5lux/ 10lux/ 25lux/ 50lux/ 100lux/ Disable
Stand-by period	0s / 5s / 5min / 10min / 30min / 1h / +∞
Stand-by dimming level	10% / 20% / 30% / 50%
Dimming range	1-100% with 0-10V Dimming Port
Ingress Protection	IP40
Operation Voltage	220-240VAC, 50Hz
Operation Temperature	-20°C ~ 45°C
Frame	Aluminum
Installation way	Attach to lighting fixture or install separately
Finishing	Silver, Matt White, Matt Black




Wall mounting  
1~1.8m



Ceiling mounting  
2.5~10m

### Automation Effect

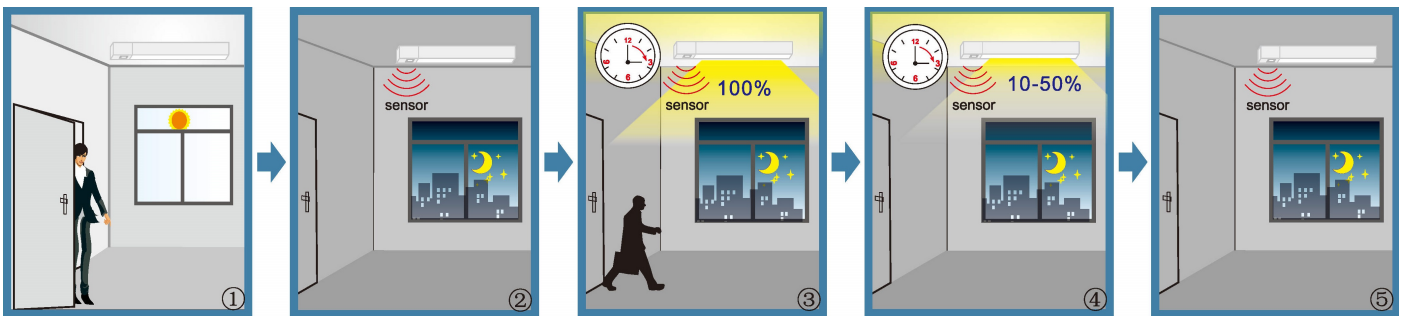

with sufficient ambient light, lighting fixture would not work even if movement is detected.

with insufficient ambient light, lighting fixture would not work if no movement to be detected.

with insufficient ambient light, lighting fixture would work as per hold time if any movement to be detected.

stand-by period function would be activated after hold time function if no any further movement to be detected.

light fixture would be turned off after stand-by period if no any further movement to be detected.